



HD05R Remote Control Keys Function Introduction

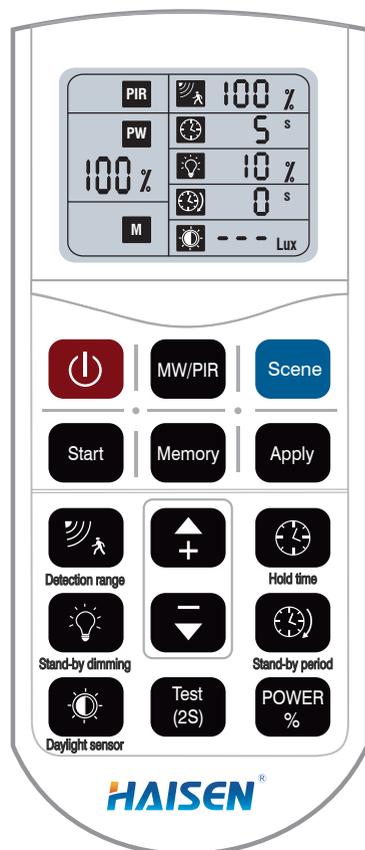

Remote Keys	Keys Function	Keys Introduction
	ON/OFF	Switch ON/OFF the light; Switch OFF the sensor function.
	MW/PIR	Mode Switch
	Reset	Switch to Sensor mode and recover all settings to be factory defaulted setting(Detection area-100%, Hold time-5s, Daylight- Disable, Standby Period-0s, Stand-by dimming level-10%.
	Start	Press the key to start the setting of parameters with memory and apply function under the sensor mode. 1. Press "Start", there will be a letter "S" flashes in the lower left corner of the display, then start to set up all parameters; 2. After setting all parameters, press "Memory" to store the settings and keep it until the next reset; 3. Press "Apply" to the set sensor with stored settings within the remote IR range ; 4. Note: All data shown in the display are the settings after pressing "Memory".
	Memory	
	Apply	
	Detection area	Under sensor mode, press the key, the corresponding icon on the display flashes, press "+" / "-" to select the sensitivity.
	Hold time	Under sensor mode, press the key, the corresponding icon on the display flashes, press "+" / "-" to select the hold time. HD06VCRH 7B2:5s/30s/1min/3min/5min/10min/20min/30min HD015VCRH:5s/30s/1min/3min/5min/10min/20min/30min HB001 VCR 1:10s/1min/5min/10min HB002VCR:5s/30s/1min/3min/5min/10min/20min/30min
	Daylight Threshold	Under sensor mode, press the key, the corresponding icon on the display flashes, press "+" / "-" to select the daylight threshold.
	Stand-by period	Under sensor mode, press the key, the corresponding icon on the display flashes, press "+" / "-" to select the low brightness time. HD06VCRH 7B2:0s/10s/30s/1min/5min/10min/30min/60min+∞ HD015VCRH:0s/10s/30s/1min/5min/10min/30min+∞ HB001 VCR 1:1min/30min/60min+∞ HB002VCR:0s/10s/30s/1min/5min/10min/30min/60min+∞
	Stand-by dimming level	Under sensor mode, press the key, the corresponding icon on the display flashes, press "+" / "-" to select the low brightness during stand-by period.
	UP	After pressing different parameter keys, press either of the key to adjust(UP/DOWN) the required parameters.
	DOWN	
	POWER	Under sensor mode, press "POWER", the letter of "PW" flashes in the middle left of the display, press "+" / "-" to increase/decrease the output power.
	Test mode	Press the key to enter the test mode under sensor mode. It won't be memorized after power OFF. The parameters under test mode is: detection area-100%, hold time-2s, daylight-disable, stand-by period-0s, stand-by dimming level-10%.
Notes	Press"Scene" to reset the remote before using. During the setting of each parameter, the icon will flash for 5s, after that, the setting will be kept automatically.	

HD05R Remote Control Procedure

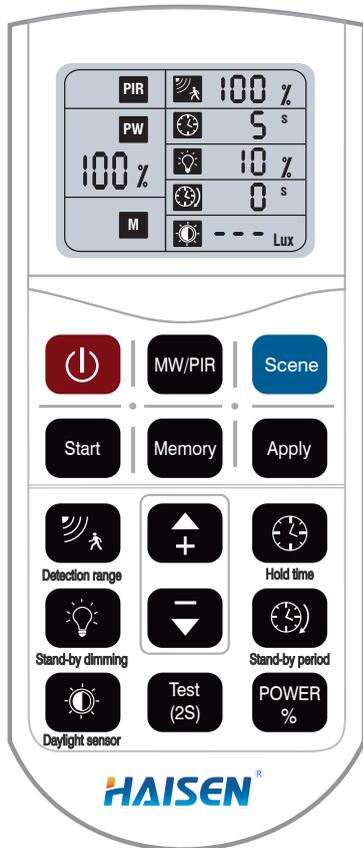

1. Microwave motion sensor settings- One sensor

- ① Step 1 – Press "ON/OFF" to turn on the light.
- ② Step 2 – Press "Scene" to reset the remote and switch to sensor mode.
- ③ Step 3 – Press related keys to set Detection Area, Hold Time, daylight threshold, stand-by period and stand-by dimming level with pressing "+" / "-" within 5s when the icon start to flash.
- ④ Then all settings would be kept automatically until the next reset.

2. Start / Memory / Apply-Applied to more sensor

- ① Press "ON/OFF" to turn on the light
- ② Press "Scene" to enter sensor mode. Then press "Start" to start the user-defined setting.
- ③ Press related keys to set Detection Area, Hold Time, daylight threshold, stand-by period and stand-by dimming level with pressing "+" / "-" within 5s when the icon start to flash.
- ④ Press "Memory" to store the setting.
- ⑤ Press "Apply" to all sensor within remote IR range, the light will blink rapidly when receiving the signal, means the sensor has been set successfully.

2. Power Output Setting

- ① The output could be set under two mode-Sensor Mode and Always ON Mode.
- ② Under always ON mode, press "+" / "-" to adjust the output from 10%~100%.
- ③ Under the sensor mode, press "Scene"- "Power", then press "+" / "-" to adjust the output from 60%~100%.

* Note: Under the sensor mode, the data shown in the display could be set from 10%~100%, but the brightness would be 60% at lowest and won't dim any more.