

PROJECT	TYPE	CATALOG #

Description

The 03-LPS Series is designed to provide 375 to 600 watts of emergency power to incandescent, fluorescent, induction and/or LED fixtures. The 03-LPS unit provides clean, sinusoidal AC output power allowing it to be remotely mounted up to 1,000 feet away from the controlled fixture(s).

Unlike a fluorescent ballast or LED emergency pack, the 03-LPS provides power to the input side of the fixture, (including the ballast) eliminating any chance of incompatibility. The 03-LPS Series is designed for surface mounting. All 03-LPS systems will provide emergency power output for a minimum of 90-minutes.

Features

- For powering incandescent, fluorescent, induction and LED fixtures
- Sinusoidal output eliminates compatibility problems
- Universal 120/277VAC, 60Hz. input/output
- Unit capacities up to 600 Watts
- "Soft Start" design reduces fixture inrush current
- Unit may be installed up to 1,000 feet from controlled fixture(s)
- Lumen output from fixture is 100% of nominal
- Unique design eliminates compatibility problems with LED drivers as well as fluorescent and induction ballasts
- Compatible with dimming ballasts
- Normally-ON and/or Normally-OFF load output
- Provisions for local switching capability - Always on during emergency conditions regardless of local switch position
- Emergency fixtures can be ON, OFF or SWITCHED
- Solid-state, line latched low voltage disconnect provides protection against deep discharge
- Long-life, maintenance free lead-calcium battery
- Momentary test switch
- AC-ON, Charge-ON and Inverter-ON LED Indicator



True Sinusoidal Output Power

03-LPS-375 Model



03-LPS-600 Model

Electrical Specifications

Input

- Input Voltages: Universal 120 or 277VAC, 60Hz (User selectable with (2) wire jumpers provided)
- Input Frequencies: 60Hz \pm 2%
- Input Surge Protection: Meets UL924
- Input Protection: Provided by Service Panel rated at 20 amps maximum

Output

- Output Voltages: 120 or 277VAC (60Hz)
- Efficiency Rating: 98% at full rated load (line)
- Waveform: Sinusoidal (digitally controlled)
- Static Voltage: \pm 5% during battery discharge. 0-100% linear load.
- Output Frequencies: 60Hz. \pm 0.3Hz during emergency cycle
- Output Distortion: Less than 3% THD (linear load)
- Transfer Time: Less than 1.0 second.
- Load Power Factor Range: 0.88 Lead to 0.88 Lag.
- Minimum Loading: 0% of rated system capacity.
- Output Protection: Circuit breaker.

Housing

- Heavy duty steel cabinet is finished in white based-on powder providing scratch and corrosion resistance.

Mounting

- **Surface Mount:** Designed for mounting to walls by means of keyhole slots provided in the back of the unit housing.

PROJECT	TYPE	CATALOG #

Warranty / Listing

- **Unit:** (excluding lamps) Full coverage against defects in materials and workmanship for 3 years from date of shipment.
- **Battery:** 3 years full warranty plus an additional 7 years of pro-rata coverage.
- All models are UL924 Listed and meet NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations 20° - 30°C.
- Optional -CEC models are Certified to CEC Under Title 20 regulations

Load Compatibility

03-LPS model's clean, sinusoidal AC output will operate incandescent lamps as well as all common fluorescent, induction and LED lamp types. Consult factory for compatibility with all other lamp types.

Lighting loads are driven at 100% output for the entire emergency power cycle. This outstanding feature translates into greater occupant egress vision and safety.

Wiring

Connection to an unswitched AC circuit is required by the NEC. Wiring access is provided for by conduit knockouts in the unit housing.

Battery

Battery: Sealed Lead Calcium (10 year life)

Battery Voltage: 60VDC for 03-LPS-375 model and 96VDC for 03-LPS-600 model

Runtime: 90-minutes standard- based on battery performance at (25°C).

Other runtimes available, consult factory.

Battery Protection: Low Voltage Battery Disconnect protects the battery from being severely damaged by deep discharge during prolonged power failures.

Reverse Polarity, DC Overload and Short Circuit Protection provided by a DC input breaker and fuse.

Charger

Charger Type: Fully automatic, temperature compensated, dual-mode charger

Power Consumption: (charger only)

37W maximum (2.5W in standby) for 03-LPS-375 model, and

56W maximum (5W in standby) for 03-LPS-600 model

Battery Circuit Breaker: Also used as battery isolator.


Recharge Duty Cycle: Meets UL924 requirements

Controls: Momentary test switch, AC-ON, Charge-ON and Inverter-ON LED indicator lights

Safety Circuitry: AC Lockout prevents battery discharge prior to initial unit power-up.

Brownout Protection automatically switches the unit to emergency mode when utility voltage is significantly reduced.

Dimensions

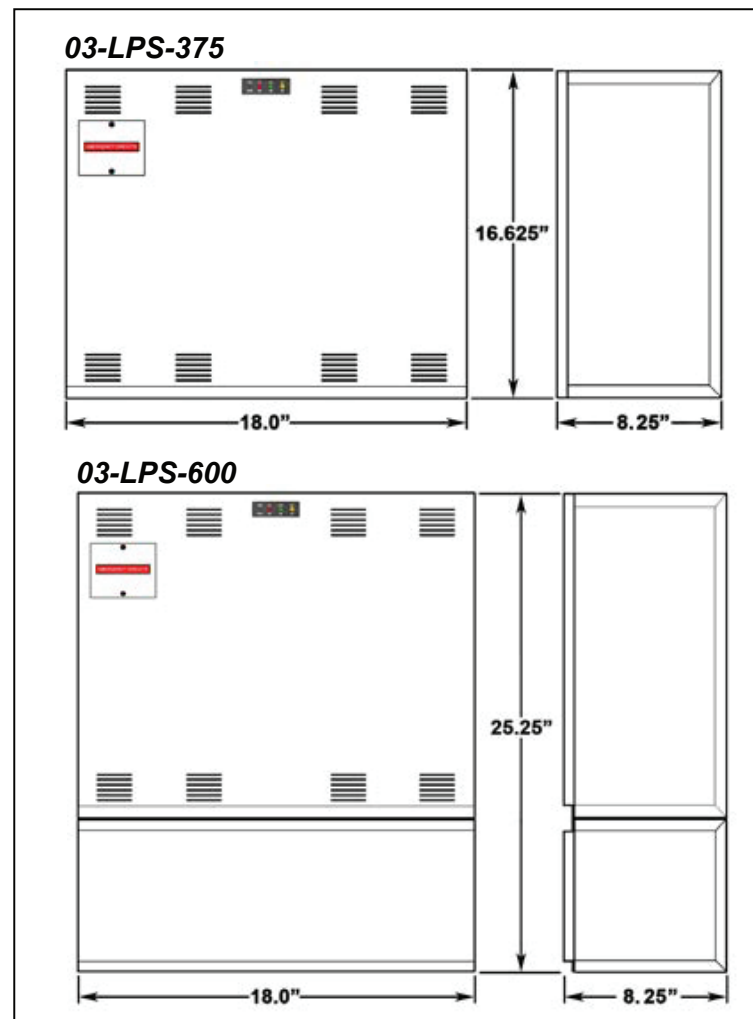

PROJECT	TYPE	CATALOG #

Environmental

High Altitude Operation: Maximum operating temperature drops 1 degree C per 300 meters (2 degrees F per 1000 Feet) above sea level.

Operating Temperature Range: 20°C to 30°C (68°F to 86°F)

NOTE: Optimum system performance between 20°C and 30°C (68°F to 86°F); temperatures outside of this range will affect battery performance and life.

Relative Humidity: 95% non-condensing

Operation

Upon failure of the normal utility power the 03-LPS unit is automatically turned on by a solid-state switching circuit and provides a minimum of 90-minutes of emergency power to the connected load. Lumen output will be maintained at 100% of the lamp's rating throughout the entire duration.

A solid-state low voltage disconnect circuit is used to protect the battery from being severely damaged by a deep discharge. When normal utility power is restored, the unit switches the load back to normal utility operation and the fully automatic, temperature compensated, dual mode charger begins to restore the battery; bringing it to full charge within UL924 specified parameters. A brownout sensing circuit insures proper operation during "low line" conditions.

System Options


ADD SUFFIX	DESCRIPTION
-OCB1	One Output Breaker
-OCB2	Two Output Breakers
-ICB	Input Breaker
-SP	Special Housing Color (specify)
-4AO	Adjustable Output/Dimmer Bypass ⁽¹⁾ / ₍₂₎
-4C	Four Output Circuit Switching ⁽¹⁾ / ₍₂₎
-SDT	Self-Testing / Self-Diagnostics ⁽¹⁾

(1) For more information, separate specification sheets are available on the -4AO, -4C and -SDT options. Consult factory

(2) Not available together

System Status Monitoring Panel

All 03-LPS Systems provide a monitoring panel on the front of the unit to show operating status at all times. The panel provides a test switch for user initiated system tests and a 3-LED array that provides an intuitive visual indication of unit readiness.

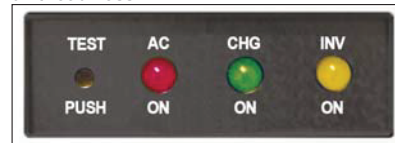

Improved Aesthetic

The 03-LPS system's sinusoidal AC output design eliminates voltage drop and proximity concerns. This allows added flexibility in installation location as 03-LPS units can be installed hundreds of feet from the units they power. This means 03-LPS units to be located conveniently out of sight in closets or utility rooms without interrupting architectural aesthetics.

In lighting applications, no special or additional emergency fixtures are necessary. Simply designate and connect existing lighting fixtures, either interior or exterior, to the 03-LPS unit for emergency operation eliminating the need for exposed, stand-alone emergency luminaires.

03-LPS System Advantages

Compared to traditional discrete emergency lighting units, the 03-LPS Series provides emergency illumination from a single power source resulting in lower maintenance overhead and routine testing expenses.

03-LPS units lower installation costs by powering existing lighting fixtures during emergencies. Since connected fixtures are driven at full brilliancy, they provide far superior egress lighting and deliver improved occupant safety.

Suggested Specification

An inverter system with sinusoidal output shall be supplied capable of powering any combination of lighting fixtures, including incandescent, fluorescent, induction and/or LED light sources without compatibility problems.

General Specifications

MODEL NUMBER	INPUT/OUTPUT VOLTAGE	CAPACITY For 1 1/2 Hrs. (Watts/VA)	SYSTEM WEIGHT		SYSTEM EFFICIENCY (Full Load)	NUMBER OF BATTERIES	BATTERY VOLTAGE (VDC)	BATTERY CURRENT (Amps)	AC INPUT CURRENT (MAX)		THERMAL OUTPUT (BTUs)	
			Lbs.	Kg.					120VAC	277VAC	On-Line	Emergency
03-LPS-375	120/277VAC	375/375	113	51.3	98%	5	60	7.3	3.43	1.49	11	205
03-LPS-600	120/277VAC	600/600	172	78.1	98%	8	96	7.1	5.50	2.38	15	275

PROJECT	TYPE	CATALOG #

The system shall transfer in less than 1.0 second to reliably back up lighting fixtures without loss of illumination and operate any and all connected lighting fixtures at full lumen output during the complete 90-minute discharge cycle.

The input voltage shall be the same as the output voltage and shall be single phase 120/277 volts, 60Hz. Output capacity will be (375W/375VA) / (600W/600VA) for a minimum duration of 90-minutes.

The design shall be a standby, off-line inverter with on-line efficiency of 98%; on-line double conversion UPS systems shall not be considered acceptable alternatives. 03-LPS system output shall be a PWM generated sine wave with less than 3% total harmonic distortion with "Soft-Start" design reducing fixture inrush current. The system shall also provide short circuit and overload protection as standard.


An intuitive three LED display shall provide system operational information at a glance and alert user to any malfunction in system performance. Authorized maintenance personnel shall have access to the system's controls while being protected from any live exposed connections.

Protective devices shall include AC Line fuse, DC input breaker and a DC input fuse. The entire 03-LPS system, including batteries, shall be incorporated into compact cabinetry which shall have provisions for surface mounting.

System shall be capable of providing up to 4 switch bypass circuits, adjustable output or 2.5 to 10 volt dimmer bypass, remote test switch, and self-test/self-diagnostics, where necessary.

System shall utilize a sealed lead calcium battery with a 10 year design life. The charger shall be temperature compensated, dual mode type, and recharge the battery as per UL924 guidelines. Entire system shall be tested, approved, and labeled to UL924 Emergency Lighting and Power Systems standards.


Wiring Diagrams

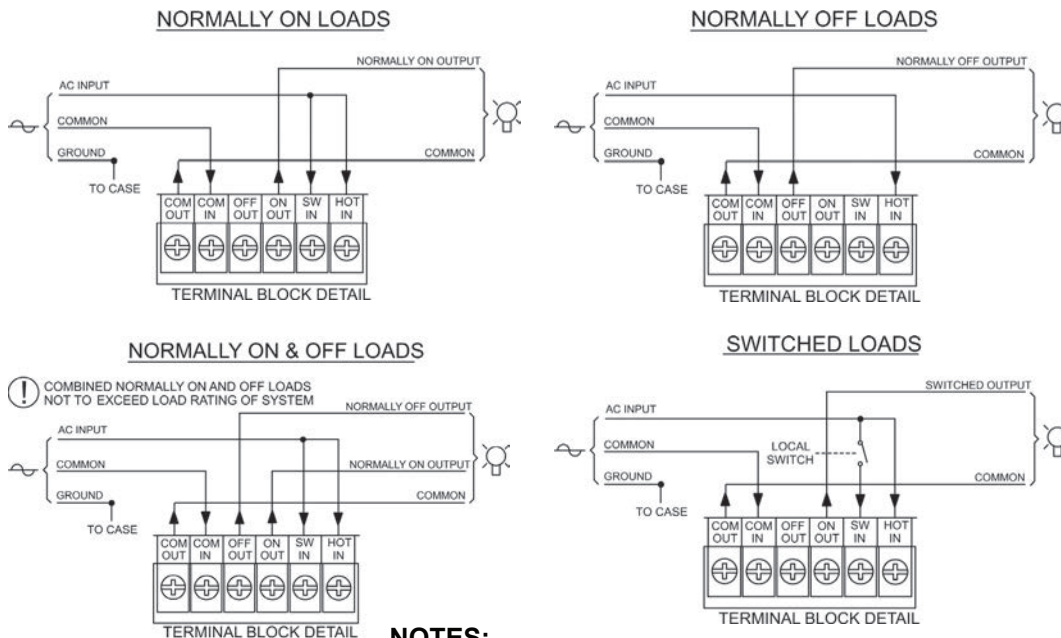

NOTES:

- ⚡ INPUT SUPPLY FROM UNSWITCHED UTILITY RATED 20 AMPS MAXIMUM.
- 💡 OUTPUT(S) TO LIGHTING LOADS

Voltage Selection Detail

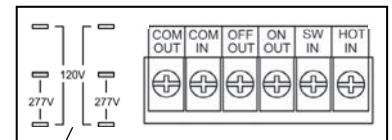

NOTE:

Factory terminated jumper wires are provided with 03-LPS Systems for making user selected input/output voltage connections.