



# COST LESS LIGHTING

## 03-BLEMSLP-CP


CONSTANT-POWER LED EMERGENCY  
DRIVER WITH SEPARATE BATTERY

p. 866.633.6883 • f. 866.699.8099 • CostLessLighting.com


PROJECT

TYPE

CATALOG #

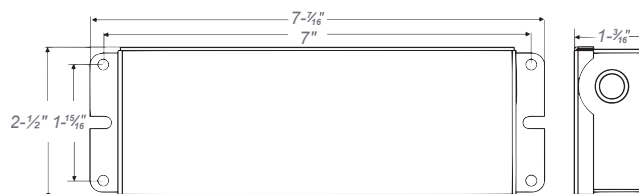

Battery Bracket

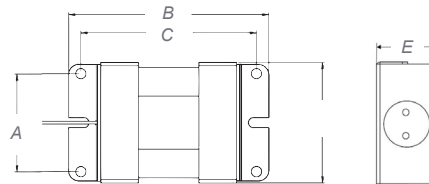

Sample Part Number: 03-BLEMSLPCP-10

MODEL	OUTPUT POWER
03-BLEMSLP-CP	-5 = 5 Watts -10 = 10.7 Watts

Battery Bracket Model	A	B	C	D	E
03-BLEMSLP-CP-5	1-15/16"	3-7/8"	3-7/16"	2-3/8"	1-3/16"
03-BLEMSLP-CP-10	1-15/16"	6-3/4"	6-1/4"	2-3/8"	1-3/16"

## Specifications

### Electrical

- Universal 120-277V, 50/60 Hz input.
- Charge/Power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- Long-life, maintenance free, rechargeable lithium iron phosphate battery.
- Output short/overcurrent protection: Electronic limiting, with normal operation resuming upon removal of fault.
- 90-minute minimum emergency operating time over full temperature range.
- Output classification: Class 2 Compliant.
- Surge protection: Per C62.41 (TVS).
- Input overcurrent protection: Fusible link.
- 24 hour maximum battery recharge time
- Works with or without an AC driver to convert new or existing LED fixtures into unobtrusive emergency lighting.
- Provides constant power output to the load during emergency mode operation.
- Designed to operate NORMALLY-ON, NORMALLY-OFF or SWITCHED LOAD fixtures.

### Housing

- LED illuminated test switch.
- Low profile galvanized steel construction.
- Compact split design fits most LED fixtures.

### Mounting

- Suitable for installation inside LED fixtures.

### Code Compliance

- UL Listed for factory or field installation.
- Suitable for damp locations (10°C - 55°C).
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State codes.
- Certified to CEC under Title 20 regulations.

### Warranty

- Five year warranty on all electronics and housing.

## Electrical Information

MODEL	INPUT CURRENT (A)	INPUT POWER (W)	OUTPUT VOLTAGE (V)	OUTPUT POWER (W)	OUTPUT CURRENT (mA)
03-BLEMSLP-CP-5	0.061	3.9	20-50	5.0	250-100
03-BLEMSLP-CP-10	0.087	5.7	20-50	10.7	535-214

## Coordination Guidelines

These guidelines were developed to allow the lighting system Designer/Specifier to predict the operating performance levels of LED luminaires when powered by an electrically compatible emergency driver. It is ultimately the responsibility of the Designer/Specifier to ensure that the as installed system delivers the code-compliant path of egress illumination.

### 1) Determine Electrical Compatibility

- A) Verify that the Luminaire LED Driver, where applicable, is Class 2 compliant.
- B) Verify that the Luminaire LED Lamp(s) have an operating voltage between 20Vdc and 50Vdc range.
- C) Verify that the Luminaire LED Lamp(s) have a power rating equal to, or greater than, the emergency power rating of the emergency driver under consideration (refer to the Electrical Information section).

### 2) Calculate Lumen Output During Emergency Operation

- A) Access luminaire data by logging onto Design Lights Consortium ([www.designlights.org](http://www.designlights.org)).
- B) Select "Search the DLC Qualified Product List" on the DLC homepage.
- C) Enter manufacturer name and P/N of luminaire under consideration in the "search by keyword" text window.
- D) Select "Search" tab to open the "Qualified Products List".
- E) Determine luminaire Lumens per Watt efficacy in "Rated Data" specifications.
- F) Multiply luminaire Lumens per Watt by Emergency Output of the emergency driver under consideration (refer to Electrical Information section). This figure is the Lumens available from the luminaire during emergency operation.

### 3) Determine Suitability of Means of Egress Lighting Levels

- A) Using industry standard lighting design software, along with IES files for the luminaire under consideration, verify that the as installed available Lumens (as calculated in 2F above) are sufficient to meet Code-compliant path of egress illumination levels.

While the emergency driver series has been found compliant with the requirements of UL Standard 924, it is ultimately the responsibility of the Designer/Specifier to ensure the as-installed system delivers code-compliant path of egress illumination in accordance with Federal, State or local municipal requirements.