




| PROJECT | TYPE | CATALOG # |
|---------|------|-----------|
|         |      |           |



Standard

Optional

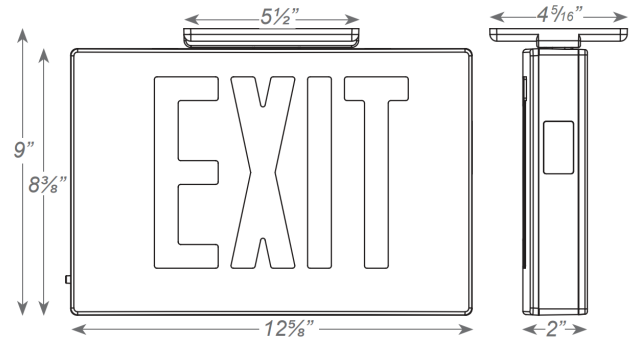

| MODEL  | NUMBER OF FACES  | LETTER COLOR | FACE PANEL                 | HOUSING COLOR              | BATTERY                   | OPTIONS   |
|--------|--|--------------|----------------------------|----------------------------|---------------------------|---|
| 04-XDC | Single face<br>Double face<br>Universal Single/double face | Red<br>Green | White<br>Black<br>Aluminum | White<br>Black<br>Aluminum | AC-Only<br>Battery Backup | Self Diagnostics*<br>Dual circuit w/ 120V**<br>Dual circuit w/ 277V**<br>Tamper-proof<br>Assembled in USA |

## Specifications

### Housing

- Premium-grade, die-cast aluminum housing (also available in optional black or white powder-coated finishes).
- Field selectable knockout Chevron directional indicators.
- Unique design allows double face conversion in the field.
- Quick-snap face plate closure.

### Electrical

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

### Illumination

- Ultra bright, energy efficient, long life Red or Green LEDs.

### Mounting

- Aluminum mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.

### Options

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes.
- 2C-120V/2C-277V: Dual circuit option on the AC-only unit enables it to be connected to two different power supplies at the same time.
- TP: Tamper-proof hardware helps discourage unauthorized access to the unit.
- USA: Substantial transformation assembly in the U.S. complies with "Assembled in the USA" under the Buy American Act.

### Code Compliance

- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).
- Certified to CEC under Title 20 Regulations

### Warranty

- 5 year warranty on all electronics and housing. Battery prorated for 5 years.

\*available only with EM units

\*\*not available with EM units



## Electrical Information

| CATALOG NUMBER         | INPUT WATTS (W) |      | INPUT AMPS (A) |       |
|------------------------|-----------------|------|----------------|-------|
|                        | 120V            | 277V | 120V           | 277V  |
| 04-XDC-RED/EM/2C/SDT   | 3.2             | 3.6  | 0.031          | 0.019 |
| 04-XDC-GREEN/EM/2C/SDT | 3.8             | 4.4  | 0.033          | 0.017 |