




# **Die-Cast Aluminum LED Exit Sign**



## **OPTIONS**

- TP: Tamper-proof hardware helps prevent unauthorized access to the unit.
- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes.
- 2C: Dual circuit option on the AC-only unit enables it to be connected to two different (one acting as a back-up to the other) supplies at the same time.
- USA: Substantial transformation assembly in the U.S. complies with "Assembled in the USA" under the Buy American Act.

## **DIMENSIONS**

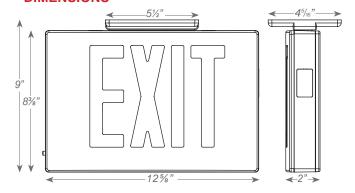

#### **ILLUMINATION**

Ultra bright, energy efficient, long life Red or Green LED.

#### **ELECTRICAL**

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long life maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

## **MOUNTING**

- Aluminum mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.

#### HOUSING

- Premium-grade, aluminum housing (also available in black or white powder-coated finishes).
- Field selectable knockout chevron directional indicators.
- Unique design allows double face conversion in the field.
- · Quick-snap face plate closure.

## **WARRANTY / LISTING**

- Five year warranty on all electronics and housing. Battery pro rated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C − 50°C).

Job Information: Type:
Job Name:

Catalog #:

#### ORDERING INFORMATION

| _         | MODEL  |   | No. of FACES                     | LETTER COLOR |       | PANEL |          | HOUSING COLOR |          | BATTERY |                | OPTIONS |                          |
|-----------|--------|---|----------------------------------|--------------|-------|-------|----------|---------------|----------|---------|----------------|---------|--------------------------|
|           | 04-XDC | 1 | Single Face                      | R            | Red   | W     | White    | W             | White    | Blank   | AC Only        | SDT     | Self-diagnostics 1       |
|           |        | 2 | Double Face                      | G            | Green | В     | Black    | В             | Black    | EM      | Battery Backup | 2C      | Dual circuit Operation 2 |
| vith EM ι | ınits. | 3 | Universal Single/<br>Double Face |              |       | Α     | Aluminum | Α             | Aluminum |         |                | TP      | Tamper-Proof             |
| vith AC u | ınits  |   |                                  |              |       |       |          |               |          |         |                | USA     | Assembled in USA         |

<sup>&</sup>lt;sup>1</sup> Available only with EM unit

<sup>&</sup>lt;sup>2</sup> Available only with AC unit