



# COST LESS LIGHTING

## 04-RHLED Indoor LED Remote Heads

### ILLUMINATION

- Long lasting, efficient, ultra bright white LED lamp heads.
- High performance chrome-plated metallized reflector and plastic lens with 8 or 12 LED's in each lamp head for optimal light distribution.
- Adjustable LED lamp heads increases center-to-center spacing

### ELECTRICAL

- Powered from low voltage power source with low voltage wiring (not provided).

### MOUNTING

- Universal mounting base mounts to single-gang switch box.
- Distance of maximum run is determined by system voltage, wire gauge and total maximum wattage on the run.
- Suitable for wall or ceiling mount.

### HOUSING

- Indoor application remote heads are injection-molded, engineering-grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.

### WARRANTY


- UL Listed with approved Best Lighting products.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- 5 year warranty.



### FIXTURE COMPATIBILITY CHART

Reference individual unit equipment specification sheets for remote load capacity availability.

Model Type	Standard and HL	LP
LEDCXTEU	X	
CLPU	X	
CKXTEU	X	
LEDR5HO	X	X
LEDRX-5HO	X	X
LEDTFX-2	X	
E-1	X	X
CEU	X	X
R-5HO	X	
R-16HO	X	
DXR	X	
TFX-2	X	
NYDXR	X	
CXTEU HO	X	

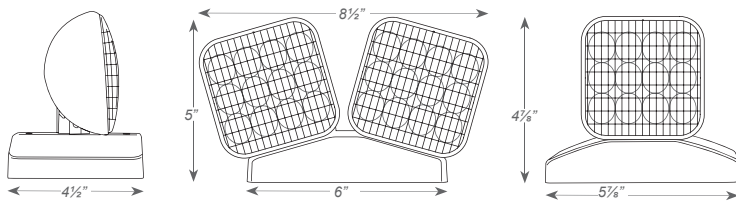

### PRODUCT PARAMETER

MODEL	NO. of HEADS	OPTIONS	HOUSING	VOLTAGE	COLOR	LAMP TYPE <sup>1</sup>
04-RHLED	1 Single Head	Blank For standard non-self-diagnostic fixtures	Thermoplastic	3.6V For use with 3.6V batteries	Blank White	Blank 8 LEDs 1W <sup>2</sup>
	2 Double Head	STD For use with fixtures with a self-diagnostic option		MV For use with 3.6V, 6V, 9.6V & 12V batteries	B Black	HL 12 LEDs 1.5W <sup>2</sup> LP 1 LED 1W <sup>3</sup>

**Notes:**

1. Wattage rating stated per head.
2. Not available with 3.6 option.
3. Not available with MV option.