



www.COSTLESSLIGHTING.com

Cost Less Lighting



New York City Approved Emergency Lights



FEATURES

- Front access panel is hinged for trouble free installation
- Universal mounting pattern and conduit knockouts allow for easy installation
- Front, top or side mount heads
- Capable of powering multiple remote heads
- Stamped conduit knockouts standard on all units
- White Powder Coat Finish
- Custom Colors Available

Overall Sizes

- (Without 2 Heads) 9" x 10" x 2.5"
- (With 2 Heads) 14.5" x 10" x 2.5"
- (Without 3 Heads) 10.5" x 14.5" x 2.5"
- (With 3 Heads) 15.5" x 14.5" x 2.5"

Weight

5 - 15 lbs. Depending on Wattage

Construction

Durable 20 gauge steel cabinet finished in a white powder coat

Battery

- Maintenance free, sealed lead calcium battery
- Nickel Cadmium battery available


Lamps

- Standard lamp heads = Par36 Style
- Par 18 Style and MR16 lamps available

Approvals

- Certified by ETL or CSA to UL 924 Standard

DIMENSIONS

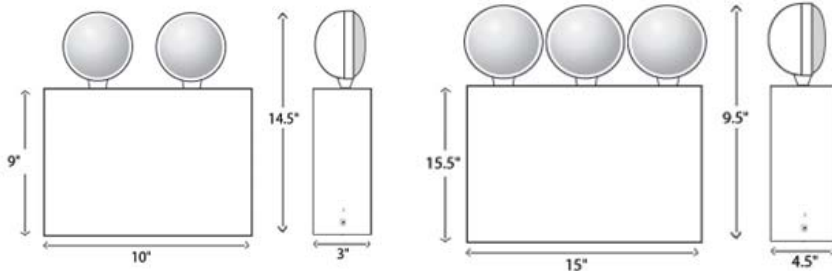

Electronics

- Fully automatic current limited pulse switching charger
- Line-latched prevents unnecessary discharge of battery
- Temperature compensated components in the circuitry
- Brownout and short circuit protection
- Dual diagnostic LED display that indicates AC/ON and High Charge
- Push-to-test switch 120/277 field selectable inputs

Series	Volts	Watts	Heads	Head Mounting	Lamps	Options	
04-NYE	6 = 6 Volt	12 = 12 (6v)	0 = 0 Head	TM = Top Mount	See Lamp Selection Above	SD = Self Diagnostics	FP = Food Prep Lens
	12 = 12 Volt	18 = 18 (6v)	1 = 1 Head	SM = Side Mount		V = Voltmeter	MH = Metal Heads
		27 = 27 (6v)	2 = 2 Heads	FM = Front Mount		A = Ammeter	CS = Cord Set
		50 = 50 (6v, 12v)	3 = 3 Heads			NC = NiCad	P18 = Par 18 Heads
					TP = Tamper Proof Screws	MR16 = MR16 Heads	
						CC = Custom Color	