





PROJECT	TYPE	CATALOG #



Model	Length (L)	Width (W)	Depth (H)	Weight
2L	4.3"	1.7"	5.8"	1 lbs.
4L	8.7"	1.9"	9"	4 lbs.
7L	8.7"	1.9"	9"	4 lbs.

Example: 08-MPAL-4L-KFS

MODEL	NOMINAL LUMEN OUTPUT SELECTABLE	COLOR TEMPERATURE SELECTABLE	MOUNTING ACCESSORIES (ORDER SEPARATELY)
08-MPA	2L = 2,000 lumens 4L = 4,000 lumens 7L = 7,000 lumens	KFS = 3.5K/4K/5K	08-MPALKFS-YKL = Yoke mount, 4L and 7L 08-MPOST17 = Line voltage ground stake

## Specifications

### Housing

- Die cast aluminum housing with durable, dark bronze powder coat finish.
- Polycarbonate lens.
- Wireway enclosure is sealed with a water-tight, silicon rubber gasket.

### Electrical

- Universal 120-277 AC voltage (50-60Hz) is standard.
- 0-10vdc dimming drivers are standard.
- Power factor > 90.
- Total harmonic distortion < 20%.

### Code Compliance

- cULus listed for wet locations in ambient temperatures from -40°C to 50°C (-40°F to 122°F).
- IP65 rated for ingress protection.
- Lens is IK 10 rated for protection from external impacts.
- Salt fog tested for 1,000 hours (ASTM B117). After salt fog testing, paint rated at 7 per ASTM D1654-05 scratch test.
- Complies with FCC Part 15, class A.
- Complies with EN61000-4-5, surge immunity protection (4kV).

### Optical System

- Field selectable 3500k (warm white), 4000k (neutral white), and 5000k (cool white) color temperatures.
- Long-life LEDs provide up to 149,000 hours of operation with at least 70% of initial lumen output (L70).\*
- Available models provide from 2,000 to 7,200 lumens, and from 125 to 156 lumens per watt (LPW).
- Standard optic provides an IES roadway type V distribution, or a 7V (vertical) x 7H (horizontal) NEMA floodlight distribution.
- Color rendering index > 80.

### Mounting

- Easy installation in new construction or retrofit.
- Standard aluminum die-cast knuckle-mount for junction box installation.
- Yoke-mount option provides secure attachment to flat surfaces, 4L & 7L only, sold separately.
- Line voltage ground stake allows for easy installation for landscape illumination, sold separately.

### Warranty

- 5 year warranty on all electronics and housing.

\*L<sub>70</sub> hours are IES TM 21 11 calculated hours.



## Electrical Data

Series	Measurements	08-MPAL-2L			08-MPAL-4L			08-MPAL-7L		
		3500K	4000K	5000K	3500K	4000K	5000K	3500K	4000K	5000K
08-MPAL-KFS	Lumens	2002	2179	2085	4436	4696	4526	6601	7170	6884
	Watts	16	15	16	31	30	31	52	49	51
	Efficacy	125	145	132	142	156	145	126	147	134
	Input Current (A)	120V = 0.13A	120V = 0.13A	120V = 0.13A	120V = 0.26A	120V = 0.25A	120V = 0.26A	120V = 0.43A	120V = 0.41A	120V = 0.43A
240V = 0.07A		240V = 0.06A	240V = 0.07A	240V = 0.13A	240V = 0.13A	240V = 0.13A	240V = 0.22A	240V = 0.20A	240V = 0.21A	
277V = 0.06A		277V = 0.05A	277V = 0.06A	277V = 0.11A	277V = 0.11A	277V = 0.11A	277V = 0.19A	277V = 0.18A	277V = 0.18A	

## Effective Projected Areas

### 2L

Front = 0.17 s.f.

Side = 0.07 s.f.

Face = 0.05 s.f.

### 4L & 7L

Front = 0.54 s.f. (knuckle) / 0.44 s.f. (yoke)

Side = 0.12 s.f. (knuckle) / 0.09 s.f. (yoke)

Face = 0.11 s.f. (knuckle) / 0.12 s.f. (yoke)



## Photometric Data


### 08-MPAL-2L-KFS

#### Luminaire Data

Description	Multi Purpose Area Light 2L - KFS
Total Lumens	2,002
Input Wattage	16
Efficacy (lm/W)	126
Max. Cd.	1131.47 (337.5H, 6V)
IES Classification	Type I
Longitudinal Classification	Very Short

#### Luminaire Classification Systems (LCS)

LCS Zone	Lumens	%Lum
FL 0-30	438	21.9%
FM 30-60	488	24.4%
FH 60-80	74	3.7%
FVH 80-90	3	0.2%
BL 0-30	434	21.7%
BM 30-60	491	24.5%
BH 60-80	71	3.6%
BVH 80-90	3	0.1%
UL 90-100	0	0.0%
UH 100-180	0	0.0%
<b>Total</b>	<b>2,002</b>	<b>100.0%</b>
BUG Rating	B1-U0-G0	

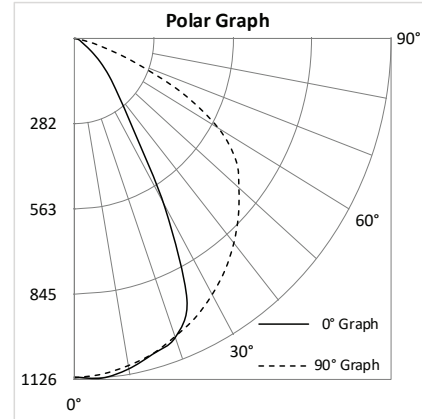


### 08-MPAL-4L-KFS

#### Luminaire Data

Description	Multi Purpose Area Light 4L - KFS
Total Lumens	4,436
Input Wattage	31
Efficacy (lm/W)	142
Max. Cd.	1625.57 (112.5H, 5V)
IES Classification	Type VS
Longitudinal Classification	Very Short

#### Luminaire Classification Systems (LCS)

LCS Zone	Lumens	%Lum
FL 0-30	625	14.1%
FM 30-60	1,190	26.8%
FH 60-80	372	8.4%
FVH 80-90	16	0.4%
BL 0-30	629	14.2%
BM 30-60	1,205	27.2%
BH 60-80	383	8.6%
BVH 80-90	16	0.4%
UL 90-100	0	0.0%
UH 100-180	0	0.0%
<b>Total</b>	<b>4,436</b>	<b>99.9%</b>
BUG Rating	B2-U0-G1	

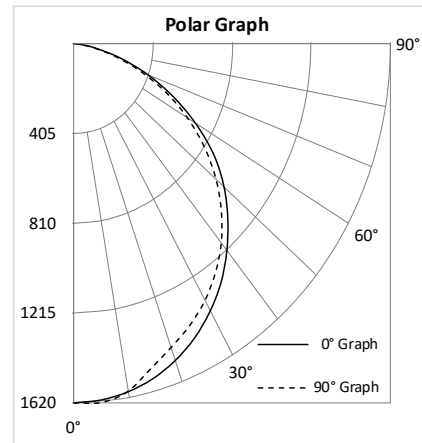

### 08-MPAL-7L-KFS

#### Luminaire Data

Description	Multi Purpose Area Light 7L - KFS
Total Lumens	6,601
Input Wattage	52
Efficacy (lm/W)	126
Max. Cd.	2750.84 (157.5H, 1V)
IES Classification	Type VS
Longitudinal Classification	Very Short

#### Luminaire Classification Systems (LCS)

LCS Zone	Lumens	%Lum
FL 0-30	989	15.0%
FM 30-60	1,783	27.0%
FH 60-80	519	7.9%
FVH 80-90	21	0.3%
BL 0-30	987	15.0%
BM 30-60	1,774	26.9%
BH 60-80	510	7.7%
BVH 80-90	19	0.3%
UL 90-100	0	0.0%
UH 100-180	0	0.0%
<b>Total</b>	<b>6,601</b>	<b>100.0%</b>
BUG Rating	B2-U0-G1	

