




PROJECT	TYPE	CATALOG #

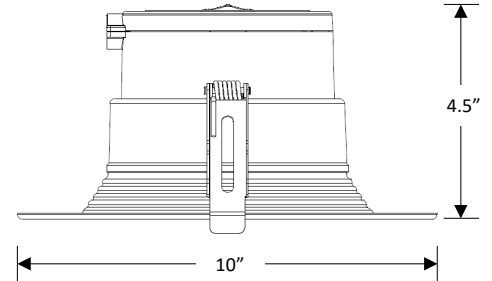

Example: 11-CDR6-2L-LKFS-WHT

MODEL	NOMINAL LUMEN OUTPUT (SELECTABLE)	KELVIN (SELECTABLE)	BAFFLE TYPE
11-CDR8	5L = 5,000lm/4,000lm/3,000lm	LKFS = 2.7K/3K/3.5K/4K/5K	WHT= White Baffle

## Specifications

### Housing

- Aluminum housing.

### Electrical

- Uses 50, 40, or 30 nominal watts.
- Universal 120-277 AC voltage (50-60Hz) is standard.
- Power factor > 0.90.
- 0-10VDC dimming is standard.

### Optical System

- Field selectable 2700k (soft white), 3000k (warm white), 3500k (warm/neutral white), 4000k (neutral white), and 5000k (cool white) color temperatures.
- Long-life LEDs provide at least 70% of initial lumen output (L70) for 149,000 hours of operation.\*\*
- Color rendering index (Ra) > 90.

### Mounting

- Easy installation in new construction or retrofit applications.
- Compatible with 8.10" ceiling cut-outs and 8" mounting frames.
- Type IC. Access above ceiling required. Covered ceiling mount only.

### Code Compliance

- cETLus listed for wet locations not exceeding 45°C (113°F).
- Energy Star certified.
- Compatible for new construction and retrofit applications.
- Complies with FCC Part 15, class B.
- Complies with EN61000-4-5 surge protection (1kV).

### Warranty

- 5-year warranty of all electronics and housing.

\*\*L<sub>70</sub> hours are IES TM 21 11 calculated hours.