




PROJECT	TYPE	CATALOG #

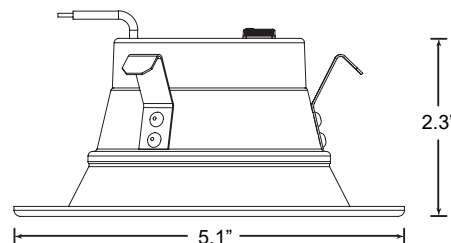

Model	Size (inches) & Weight (lbs)			
	L (in)	W (in)	H (in)	Weight
11-MODR4-7L-KFS	5.1	5.1	2.3	0.19

MODEL	NOMINAL LUMEN OUTPUT (SELECTABLE)	KELVIN (SELECTABLE)	
11-MODR4	7L = 700	KFS	2700K 3000K 3500K 4000K 5000K

Specifications

Housing

- Premium powder-coat, aluminum, white housing.

Electrical

- Universal 120 AC voltage (60Hz) is standard.
- Operating temperature (ambient): -20°C to 40°C (-4°F to 104°F).
- Triac Dimming.
- Beam angle 100°.
- Type IC.
- Power factor >0.9.
- THD < 20%.
- Easy installation in new construction or retrofit applications.

Optical System

- Field selectable 2700k (soft white), 3000k (warm white), 3500k (warm/neutral white), 4000k (neutral white) and 5000k (cool white) color temperatures.
- 700 nominal lumens.
- 10 nominal watts.
- Long-life LEDs provide at least 70% of initial lumen output (L_{70}) for 119,000 hours of operations*.
- Color rendering index > 90%.

Code Compliance

- cETLus listed for damp locations.
- Energy Star certified.
- Complies with FCC part 15, class B.
- Complies with EN61000-4-5 surge protection (0.5kV).
- Compatible for new construction and retrofit applications.

Warranty

- 5-year warranty on all electronics and housing.

Note: This device is not intended for use with emergency exits.

* L_{70} hours are IES TM-21-11 calculated hours.