




PROJECT	TYPE	CATALOG #

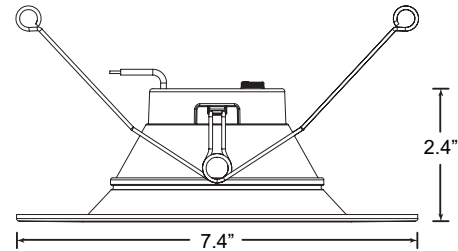

Model	Size (inches) & Weight (lbs)			
	L (in)	W (in)	H (in)	Weight
11-MODR6-10L-KFS	7.4	7.4	2.4	0.33

MODEL	NOMINAL LUMEN OUTPUT (SELECTABLE)	KELVIN (SELECTABLE)	
11-MODR6	10L = 1,000	KFS	2700K 3000K 3500K 4000K 5000K

## Specifications

### Housing

- Premium powder-coat, aluminum, white housing.

### Electrical

- Universal 120 AC voltage (60Hz) is standard.
- Operating temperature (ambient): -20°C to 40°C (-4°F to 104°F).
- Triac Dimming.
- Beam angle 100°.
- Type IC.
- Power factor >0.9.
- THD < 20%.
- Easy installation in new construction or retrofit applications.

### Optical System

- Field selectable 2700k (soft white), 3000k (warm white), 3500k (warm/neutral white), 4000k (neutral white) and 5000k (cool white) color temperatures.
- 1,000 nominal lumens.
- 14 nominal watts.
- Long-life LEDs provide at least 70% of initial lumen output ( $L_{70}$ ) for 119,000 hours of operations\*.
- Color rendering index > 90%.

### Code Compliance

- cETLus listed for damp locations.
- Energy Star certified.
- Complies with FCC part 15, class B.
- Complies with EN61000-4-5 surge protection (0.5kV).
- Compatible for new construction and retrofit applications.

### Warranty

- 5-year warranty on all electronics and housing.

Note: This device is not intended for use with emergency exits.

\* $L_{70}$  hours are IES TM-21-11 calculated hours.