


05-SMx-KFS

ROUND AND SQUARE SURFACE MOUNT - KFS

p. 866.633.6883 • f. 866.699.8099 • CostLessLighting.com

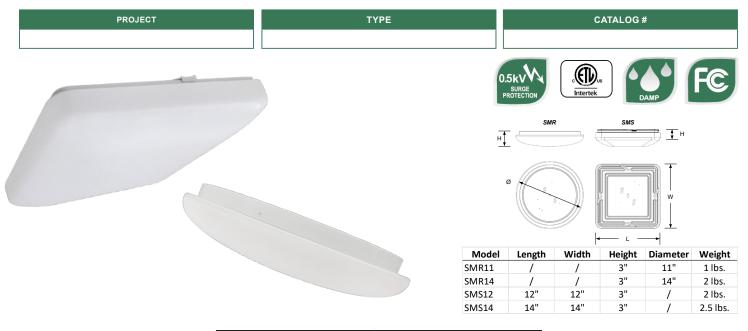

SERIES	SELECT	
05-SMR11		
05-SMR14	KFS	
05-SMS12		
05-SMS14		

Specifications

Housing

· Steel housing and polycarbonate lens

Electrical

- 11"/12" models = 14 nominal watts. 14" models = 20 nominal watts.
- · 120 AC voltage (60Hz) is standard.
- · Triac dimming drivers are standard.
- · surge protection
- Power factor > 0.90.

Code Compliance

- · cETLus listed for damp locations.
- Complies with FCC Part 15, class B.
- Surge protection (0.5kV).

Mounting

· Easy installation in new construction or retrofit applications.

Optical System

- Field selectable 2700k (soft white), 3000k (warm white), 3500k (warm/neutral white), 4000k (neutral white), and 5000k (cool white) color temperatures.*
- Long-life LEDs provide at least 70% of initial lumen output (L70) for 157,000 hours of operation.**
- SMR-KFS provides a range of 1,000 (11") to 1,400 (14") nominal lumens and 70 lumens per watt
- SMS-KFS provides a range of 1,000 (12") to 1,500 (14") nominal lumens and 73 lumens per watt.
- Color rendering index (Ra) > 80

Warranty

· 5-year warranty of all electronics and housing

^{*}Contact factory for other color temperatures and lumen packages.



05-SMX-KFS

ROUND AND SQUARE SURFACE MOUNT - KFS

p. 866.633.6883 • f. 866.699.8099 • CostLessLighting.com

Compatible Dimmers

Manufacturer	Model Number	Dimming Range	Load Switching Capacity
General Protecht	LUXDM600-12-3	10%-100%	600W
Lutron	DVCL-153P	10%-100%	150W
Lutron	DVLV-603P	10%-100%	600W
Lutron	DVELV-300P	10%-100%	300W
Leviton	TSL06-1LI	10%-100%	300W
Leviton	DSE06-10Z	10%-100%	300W
Leviton	DSM10-1LZ	10%-100%	450W