




PROJECT	TYPE	CATALOG #

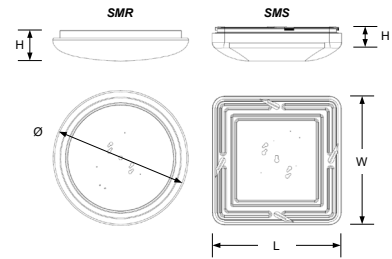

Model	Length	Width	Height	Diameter	Weight
SMR11	/	/	3"	11"	1 lbs.
SMR14	/	/	3"	14"	2 lbs.
SMS12	12"	12"	3"	/	2 lbs.
SMS14	14"	14"	3"	/	2.5 lbs.

SERIES	SELECT
05-SMR11	KFS
05-SMR14	
05-SMS12	
05-SMS14	

## Specifications

### Housing

- Steel housing and polycarbonate lens

### Electrical

- 11"/12" models = 14 nominal watts. 14" models = 20 nominal watts.
- 120 AC voltage (60Hz) is standard.
- Triac dimming drivers are standard.
- surge protection
- Power factor > 0.90.

### Code Compliance

- cETLus listed for damp locations.
- Energy Star certified.
- Complies with FCC Part 15, class B.
- Surge protection (0.5kV).

### Mounting

- Easy installation in new construction or retrofit applications.

### Optical System

- Field selectable 2700k (soft white), 3000k (warm white), 3500k (warm/neutral white), 4000k (neutral white), and 5000k (cool white) color temperatures.\*
- Long-life LEDs provide at least 70% of initial lumen output (L70) for 157,000 hours of operation.\*\*
- SMR-KFS provides a range of 1,000 (11") to 1,400 (14") nominal lumens and 70 lumens per watt.
- SMS-KFS provides a range of 1,000 (12") to 1,500 (14") nominal lumens and 73 lumens per watt.
- Color rendering index (Ra) > 80

### Warranty

- 5-year warranty of all electronics and housing

\*Contact factory for other color temperatures and lumen packages.

\*\*L<sub>70</sub> hours are IES TM 21 11 calculated hours.



## Compatible Dimmers

Manufacturer	Model Number	Dimming Range	Load Switching Capacity
General Protecht	LUXDM600-12-3	10%-100%	600W
Lutron	DVCL-153P	10%-100%	150W
Lutron	DVLV-603P	10%-100%	600W
Lutron	DVELV-300P	10%-100%	300W
Leviton	TSL06-1LI	10%-100%	300W
Leviton	DSE06-10Z	10%-100%	300W
Leviton	DSM10-1LZ	10%-100%	450W