



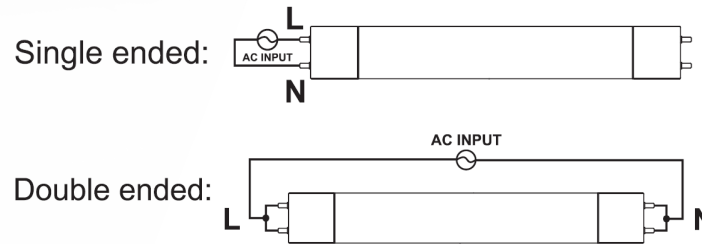

PROJECT	TYPE	CATALOG #

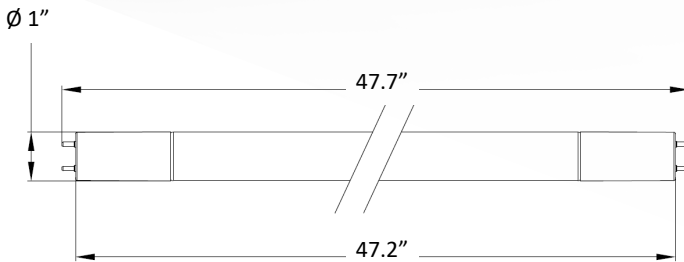

MODEL	COLOR TEMPERATURE SELECTABLE
02-L8L1-BPMFH-G2-17W-A8TSE2200-4C	3000K/3500K/4000K/5000K/6000K

## Specifications

### Housing

- Glass tubes with PBT end caps.

### Electrical

- 120-277V AC voltage (50/60Hz) is standard.
- Dimming not recommended.
- Surge protection (1kV).
- Power factor > 0.90.
- Total harmonic distortion < 20%.

### Optical System

- Field selectable 3000k (warm white), 3500k (warm/neutral white), 4000k (neutral white), 5000k (cool white), and 6000k (daylight) color temperatures.
- Long-life LEDs provide at least 70% of initial lumen output (L70) for 54,000 hours of operation.\*\*
- 02-L8L1-BPMFH-G2-17W-A8TSE2200-4C provides 2100 nominal lumens from 17 nominal watts.
- Color rendering index (Ra) > 80.

### Mounting

- Easy installation in new construction or retrofit applications.

### Code Compliance

- cULus listed for damp locations.
- Complies with FCC Part 15, class B.
- 1Kv surge protection.

### Warranty

- 5-year warranty of all electronics and housing.

\*\*L<sub>70</sub> hours are IES TM 21 11 calculated hours.