




PROJECT	TYPE	CATALOG #

#### Standard



#### Optional

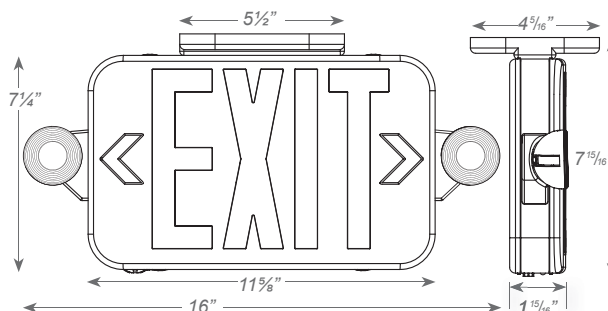

Sample Part Number: CEU3RGW

MODEL	NO. OF FACES	LETTER COLOR	HOUSING COLOR	OPTIONS
04-CEU	3 = Universal Single/Double Face	R = Red G = Green RG = Red/Green	W = White B = Black	RC = Remote Capacity* HL = High Lumen LED* SDT = Self-Diagnostic** SPV = 120/230 Volt 50/60HZ**

## Specifications

### Housing

- Injection-molded, engineering grade, 5VA flame retardant, high-impact, thermoplastic in white or black finish.

### Electrical

- Dual 120V/277 voltage standard. Optional dual 120V/230V available.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery).
- 3.6V long life, maintenance-free, rechargeable Ni-Cd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

### Optical System

- Adjustable long lasting, efficient ultra bright white LED lamp heads.
- One, 0.5W white LED per lamp head.
- Unique all inclusive lamp, reflector and lens assembly.
- Long-lasting, energy efficient Red or Green LED EXIT sign illumination.

### Mounting

- EZ-snap thermoplastic mounting canopy included provides top or end mount.
- Universal K/O pattern on back plate for wall mount

### Options

- SPV: UL Listed for special voltage option.
- HL: Provides increased center-to-center spacing (2.0W per head).
- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes. Universal 120-277 voltage with SDT option.
- RC: Remote capacity of up to 1.0 watts.

### Code Compliance

- UL Listed for damp locations (0°C – 40°C).
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Certified to CEC under Title 20 Regulations

### Warranty

- Five year warranty on all electronics and housing. Battery prorated for five years.

\*HL and -RC options cannot be combined. 0.5W of remote capacity available standard with -HL option

\*\*Not available with RG units



p. 866.633.6883 • f. 866.699.8099 • [CostLessLighting.com](http://CostLessLighting.com)

CATALOG NUMBER	INPUT WATTS (W)			INPUT AMPS (A)		
	120V	230V	277V	120V	230V	277V
04-CEU RG	1.2	N/A	1.2	0.12	N/A	0.12
04-CEU RG RC/HL	1.2	N/A	1.2	0.12	N/A	0.12
04-CEU RED/GREEN	1.2	1.2	1.2	0.12	0.12	0.12
04-CEU RED/GREEN RC/HL	1.2	1.2	1.2	0.12	0.12	0.12
04-CEU RED SDT	2.5	-	2.5	0.05	-	0.05
04-CEU RED SDT RC/HL	3.0	-	3.0	0.05	-	0.05
04-CEU GRN SDT RC/HL	2.7	-	2.7	0.05	-	0.05

[illegible]