




PROJECT	TYPE	CATALOG #



Standard



Optional

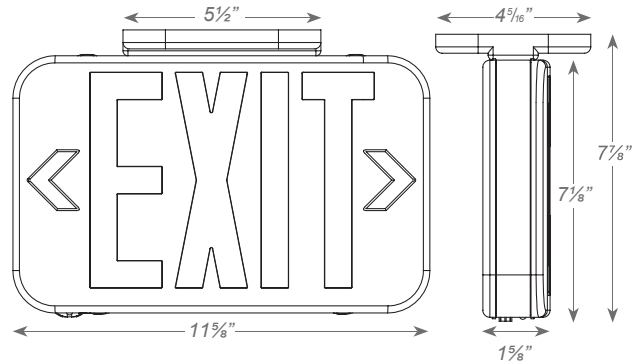

Sample Part Number: EZRXTEU2RGWEM

MODEL	NO. OF FACES	LETTER COLOR	HOUSING COLOR	BATTERY	OPTIONS
04-EZXTU	2 = Universal Single/Double Face	R = Red G = Green RG = Red/Green*	W = White B = Black	Blank = AC Only EM = Battery Backup	SDT = Self-Diagnostic** Custom = Custom Wording USA = Assembled in USA

Specifications

Housing

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- Aesthetically pleasing, curved face, rounded corner design.
- EZ snap-out chevron directional indicators.

Electrical

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 1.2V Long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Illumination

- Ultra bright, energy efficient, long life Red and/or Green LED

Mounting

- EZ-snap mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.

Code Compliance

- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).
- Certified to CEC under Title 20 Regulations.

Warranty

- Five year warranty on all electronics and housing. Battery prorated for five years.

Options

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes. Universal 120-277 voltage with SDT option.
- Custom: Signs available with requested 'special' wording.
- USA: Substantial transformation assembly in the U.S. complies with "Assembled in USA" under the Buy American Act.

*Field selectable

**Available only with EM units.

**Not available with RG units.

SALIDA face plate option available. Check with your Cost Less Lighting Representative.



**COST LESS
LIGHTING**

04-EZRXTEU

COMPACT THERMOPLASTIC

EXIT SIGN

p. 866.633.6883 • f. 866.699.8099 • CostLessLighting.com

Electrical Information

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
04-EZRXTEU-RED/GREEN EM	1.0	1.0	0.1	0.1
04-EZRXTEU-RED SDT	2.5	2.5	0.05	0.05
04-EZRXTEU-GREEN SDT	2.7	2.7	0.05	0.05