



COST LESS LIGHTING

11-DK-OS SERIES

DISK LIGHT WITH PIR SENSOR
KELVIN FIELD SELECTABLE

p. 866.633.6883 • f. 866.699.8099 • CostLessLighting.com

PROJECT	TYPE	CATALOG #



Model	Size (inches) & Weight (lbs)			
	L (in)	W (in)	H (in)	Weight
11-DK4-8L-KFS-OS	6.02	6.02	0.93	0.33
11-DK6-10L-KFS-OS	7.4	7.4	1.03	0.53

MODEL	NOMINAL LUMEN OUTPUT	KELVIN (SELECTABLE)		Integrated PIR Sensor
11-DK4	8L = 800 lm	KFS	2700/ 3000/ 3500/ 4000/ 5000K	OS
11-DK6	10L = 1000 lm			

Specifications

Housing

- Premium powder-coat, steel, white housing.

Electrical

- 120V AC voltage (60Hz) is standard.
- Triac dimming.
- Input transient surge protection = 0.5kV.
- Power factor > 0.90.
- Total Harmonic distortion < 20%.

Optical System

- Polycarbonate diffuser.
- Field selectable 2700k(soft white), 3000k(warm white), 3500k(warm/neutral white), 4000k (neutral white) and 5000k (cool white) color temperatures*.
- 11-DK4-8L-KFS-OS to provide a range delivers 770 to 812 nominal lumens*.
- 11-DK6-10L-KFS-OS to provide a range delivers 1123 to 1235 nominal lumens*.
- Long-life LEDs provide 139,000 hours of operation with at least 70% of initial lumen output (L70), and 42,000 hours with at least 90% of initial lumen output (L90)**.
- Beam angle 110°.
- Integrated PIR occupancy sensor standard.
- Sensor hold-time adjustable by switch.
- Color rendering index > 90.

Mounting

- Surface mounting and retrofit installation.
- Covered ceiling mount.

Code Compliance

- cETLus listed for wet locations.
- Energy Star certified.
- Complies with FCC part 15, class B.
- Complies with Title 24.

Warranty

- 5-year warranty on all electronics and housing.

* Default 4000K color temperature and highest lumen output.

** L70 & L90 hours are IES TM-21-11 calculated hours.



COST LESS LIGHTING

11-DK-OS SERIES

DISK LIGHT WITH PIR SENSOR

KELVIN FIELD SELECTABLE

p. 866.633.6883 • f. 866.699.8099 • CostLessLighting.com

Compatible Dimmers & Controls

Manufacturer	Model Number		
Lutron	TG-600PR-WH	SLV-600P-AL	DVCL-153P
	S-600PR-WH	DV-600PR-WH	MSCL-OP153M
	CTCL-153PDH-WH	SCL-153PH-WH	PD-6WCL
	TGCL-153PH-LA	GT-600P	MACL-153M//MA-R
Leviton	6672	6674	IPL06
	RNL06	DSL06	-

Lumen Table & Electrical Data

Series	Measurements		Mid Lumens				
			2700K	3000K	3500K	4000K	5000K
11-DK4-8L-KFS-OS	Lumens		770	785	828	837	812
	Watt		9.96	9.98	9.99	9.97	9.84
	Efficacy		77.25	78.68	82.90	83.89	82.51
	Input Current (A)	120V	0.08	0.08	0.08	0.08	0.08

Series	Measurements		Mid Lumens				
			2700K	3000K	3500K	4000K	5000K
11-DK6-10L-KFS-OS	Lumens		1,123	1,140	1,235	1,203	1,140
	Watt		13.68	13.69	14.04	13.87	13.56
	Efficacy		82.09	83.27	87.96	86.73	84.07
	Input Current (A)	120V	0.11	0.11	0.12	0.12	0.11



**COST LESS
LIGHTING**

11-DK-OS SERIES


DISK LIGHT WITH PIR SENSOR

KELVIN FIELD SELECTABLE

p. 866.633.6883 • f. 866.699.8099 • CostLessLighting.com

Dimensional Drawing

11-DK4-8L-KFS-OS

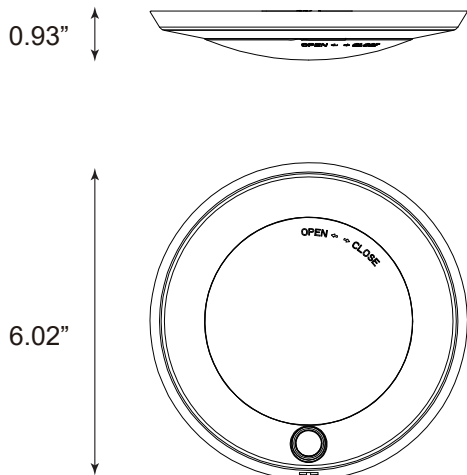

11-DK6-10L-KFS-OS

