




PROJECT	TYPE	CATALOG #

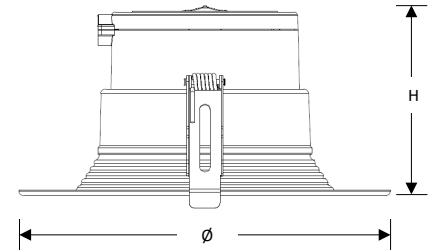

Series	Ø	H	Weight
11-CDR4-1L-LKFS-WHT	5.1"	3.2"	0.7 lbs
11-CDR4-1L-LKFS-SW	5.1"	3.2"	0.7 lbs

MODEL	NOMINAL LUMEN OUTPUT (SELECTABLE)	CCT (SELECTABLE)	REFLECTOR COLOR
11-CDR4	1L = 1,000lm / 800lm / 500lm	LKFS = 2700K / 3000K / 3500K / 4000K / 5000K	WHT= White Baffle SW= Specular White

Specifications

Housing

- Aluminum Housing

Electrical

- Universal 120-277 AC voltage (50-60Hz) is standard.
- Power factor > 0.90.
- Uses 12, 9, or 6 nominal watts

Optical System

- Field selectable 2700k (soft white), 3000k (warm white), 3500k (warm/neutral white), 4000k (neutral white), and 5000k (cool white) color temperatures.*
- 0-10VDC dimming is standard.
- Field selectable lumen output: 11-CDR4-1L-LKFS-WHT = 1,000, 800, or 500 nominal lumens. 11-CDR4-1L-LKFS-SW = 1,000, 800, or 500 nominal lumens
- Long-life LEDs provide at least 70% of initial lumen output (L70) for 149,000 hours of operation.**
- Color rendering index (Ra) > 90.

Mounting

- Easy installation in new construction or retrofit applications.
- Compatible with 4.35" ceiling cut-outs and 4" mounting frames
- Type IC. Access above ceiling required. Covered ceiling mount only.

Code Compliance

- cETLus listed for wet locations not exceeding 45°C (113°F).
- Energy Star certified.
- Compatible for new construction and retrofit applications.
- Complies with FCC Part 15, class B.
- Complies with EN61000-4-5 surge protection (1.5kV).

Warranty

- 5-year warranty of all electronics and housing

**L₇₀ hours are IES TM 21 11 calculated hours.