



COST LESS LIGHTING

08-MPALDSR

MULTI-PURPOSE AREA LUMINAIRE
LUMEN & KELVIN & DISTRIBUTION SELECTABLE

p. 866.633.6883 • f. 866.699.8099 • CostLessLighting.com

PROJECT	TYPE	CATALOG #



Model	Size (inches) & Weight (lbs)			
	L (in)	W (in)	H (in)	Weight
08-MPALDSR-242115L-3CCT	18.52	12.22	2.8	10.48
08-MPALDSR-403530L-3CCT	21.26	13.68	2.83	12.69

SERIES	NOMINAL LUMEN OUTPUT (SELECTABLE)	KELVIN (SELECTABLE)	INSTALLED OPTIONS
08-MPALDSR	242115L = 24,000 / 21,000 / 15,000 lm	3CCT 3000K / 4000K / 5000K	PR 3-Pin NEMA Photocell receptacle
	403530L = 40,000 / 35,000 / 30,000 lm		

Specifications

Housing

- Premium powder-coat, die cast aluminum, dark bronze housing.

Electrical

- Operating temperature (ambient): -40°C to 50°C (-40°F to 122°F).
- Universal 120-277V AC voltage (50-60Hz) is standard.
- 0-10V DC dimming drivers are standard.
- Input transient surge protection = 6kV.
- Incoming AC power cord = 6'. Incoming dimming cord = 6'.
- Watertight, compression-type electrical connectors.
- Power factor > 0.90.
- Total Harmonic distortion < 20%.

Mounting

- Optional Arm A Mounting kit (Arm and Slip-fitter combo).
- Optional Arm Mounting kit.
- Optional Slip-fitter Mounting kit.
- Optional Yoke Mounting kit.
- Optional Trunnion Mounting kit.

Code Compliance

- cULus listed for wet locations.
- Complies with FCC part 15, class A.
- IP65 rated for ingress protection.
- IK08 rated for impact protection.

Optical System

- Polycarbonate lens.
- Field selectable 3000K (warm white), 4000K (neutral white) and 5000K (cool white) color temperatures*.
- 08-MPALDSR-242115L-3CCT Tri-lumen selectable provide a range of 15,381 to 26,687 nominal lumens*.
- 08-MPALDSR-403530L-3CCT Tri-lumen selectable provide a range of 28,342 to 42,653 nominal lumens*.
- Long-life LEDs provide 167,000 hours of operation with at least 70% of initial lumen output (L70), and 51,000 hours with at least 90% of initial lumen output (L90)**.
- Distribution selectable. Standard optic provides type III / type IV / type V distribution. Easy to configure with switch.
- Sensor-ready receptacle standard.
- Screw in sensor ready. Remote control required for programming (Sensor and remote control sold separately).
- Available factory installed NEMA photocell receptacle for 3-pin NEMA devices.
- LED color maintenance < -0.00495 chromaticity shift ($\Delta u'v'$) over the initial 6,000 hours of operation.
- Color rendering index > 80.

Warranty

- 5-year warranty on all electronics and housing.

* Default kelvin temperature 4000k, highest lumen output and Type III distribution.

** L_{70} & L_{90} hours are IES TM-21-11 calculated hours.



COST LESS LIGHTING

08-MPALDSR

MULTI-PURPOSE AREA LUMINAIRE

LUMEN & KELVIN & DISTRIBUTION SELECTABLE

p. 866.633.6883 • f. 866.699.8099 • CostLessLighting.com

Accessories (order separately)

Sensor

- 07-HD09VR-PH5-1 = Passive infrared sensor - maximum mounting height = 39 FT
07-HD09VR-MH5-1 = Microwave step-dimming sensor - maximum mounting height = 49 FT
07-HD05R = **Remote control for 07-HD09VR series Sensors for post-installation setting changes. 07-HD09VR series has 5-dial setting capability for setting changes during installation.**

Factory settings for Sensor : detection area =100%, hold time = 5 sec, stand-by period = 0 sec, stand-by dimming level = 10%, daylight threshold = disabled

Photocell

- 25-HD07VR-A-1 = 12VDC photocell; RCA jack, factory set to turn on at 10 lux, turns off at 100 lux

Note: Screws into Sensor RCA receptacle that comes standard on the fixture.

NEMA Photocell


- 08-JL-205C23-IP65 = 120-277V 3-PIN NEMA Photocell; Rated up to 1800W; Turns on at 6 lux, Turns off at 50 lux

Note: Fixture must be ordered with optional NEMA 3-pin photocell receptacle (-PR).


Mounting Option

- 08-MPALDSR-ARM-A = Adjustable Arm & Slip fitter Combo Mount Kit (round and square poles)
08-MPALDSR-ARM = Arm Mount (2-3/8" pole or pole tenon, round and square poles)
08-MPALDSR-SF = Slip Fitter (2-3/8" pole or pole tenon)
08-MPALDSR-YOKE-S = Yoke for 08-MPALDSR-242115L
08-MPALDSR-YOKE-L = Yoke for 08-MPALDSR-403530L
08-MPALDSR-TM = Trunnion Mount
08-LEDMPALPRO-D180BH = Double 180° Bullhorn Mounting Bracket
08-LEDMPALPRO-WMB = Wall Mount Bracket
08-LEDMPALPRO-WMB90 = 90° Wall Mount Bracket
08-4SQR-SP-D = 4" Round Pole Tenon
08-5SQR-SP-D = 5" Round Pole Tenon
08-4SQ-SP-D = 4" Square Pole Tenon
08-5SQ-SP-D = 5" Square Pole Tenon
08-R60-SP2-90-D = 90° Double Tenon Adapter
08-R60-SP2-180-D = 180° Double Tenon Adapter
08-R60-SP3-90-D = 90° Triple Tenon Adapter
08-R60-SP3-120-D = 120° Triple Tenon Adapter
08-R60-SP4-90-D = 90° Quadruple Tenon Adapter


** Mounting hardware sold separately. One must be ordered.*




Arm-A




Arm




Slip Fitter



Trunnion



Yoke-L



Yoke-S



COST LESS LIGHTING

08-MPALDSR

MULTI-PURPOSE AREA LUMINAIRE

LUMEN & KELVIN & DISTRIBUTION SELECTABLE

p. 866.633.6883 • f. 866.699.8099 • CostLessLighting.com

Compatible Dimmers & Controls

Manufacturer	Model Number	Dimmer Range	Load Switching Capacity
Best Lighting	DWS-010V-T	10%-100%	600W
Best Lighting	DWS-010V-D	10%-100%	600W
Leviton	IP710-LFZ	10%-100%	1200W
Lutron	DVSTV	10%-100%	450W

Effective Projected Areas (EPA)

Series	ARM MOUNT			ARM A MOUNT			SLIP FITTER MOUNT			TRUNNION MOUNT			YOKE MOUNT		
	Front (ft²)	Side (ft²)	Face (ft²)	Front (ft²)	Side (ft²)	Face (ft²)	Front (ft²)	Side (ft²)	Face (ft²)	Front (ft²)	Side (ft²)	Face (ft²)	Front (ft²)	Side (ft²)	Face (ft²)
08-MPALDSR-242115L-3CCT	1.78	0.562	0.285	1.82	0.659	0.301	1.81	0.537	0.256	1.75	0.446	0.238	1.95	0.408	0.277
08-MPALDSR-403530L-3CCT	2.26	0.629	0.314	2.28	0.723	0.33	2.27	0.59	0.285	2.11	0.499	0.266	2.44	0.503	0.33



COST LESS LIGHTING

08-MPALDSR

MULTI-PURPOSE AREA LUMINAIRE
LUMEN & KELVIN & DISTRIBUTION SELECTABLE

p. 866.633.6883 • f. 866.699.8099 • CostLessLighting.com

Lumen Table and Electrical Data

Series	Measure-ments		Low Lumen			Mid Lumen			High Lumen		
			3000K	4000K	5000K	3000K	4000K	5000K	3000K	4000K	5000K
08-MPALDSR-242115L-3CCT (Set to T3)	Lumens		15,381	16,398	16,338	21,113	22,868	22,615	23,993	25,866	25,124
	Watts		109.96	107.16	109.92	161.95	156.27	162.26	190.42	182.31	189.5
	Efficacy		139.88	153.02	148.64	130.37	146.34	139.38	126.00	141.88	132.58
	Input Current (A)	120V	0.92	0.89	0.92	1.35	1.30	1.35	1.59	1.52	1.58
		240V	0.46	0.45	0.46	0.67	0.65	0.68	0.79	0.76	0.79
		277V	0.40	0.39	0.40	0.58	0.56	0.59	0.69	0.66	0.68

Series	Measure-ments		Low Lumen			Mid Lumen			High Lumen		
			3000K	4000K	5000K	3000K	4000K	5000K	3000K	4000K	5000K
08-MPALDSR-242115L-3CCT (Set to T4)	Lumens		15,976	16,767	16,793	22,052	23,466	23,264	25,016	26,686	26,378
	Watts		107.35	105.1	107.26	156.47	152.33	156.16	182.33	176.91	182.22
	Efficacy		148.82	159.53	156.56	140.93	154.05	148.98	137.20	150.85	144.76
	Input Current (A)	120V	0.89	0.88	0.89	1.30	1.27	1.30	1.52	1.47	1.52
		240V	0.45	0.44	0.45	0.65	0.63	0.65	0.76	0.74	0.76
		277V	0.39	0.38	0.39	0.56	0.55	0.56	0.66	0.64	0.66

Series	Measure-ments		Low Lumen			Mid Lumen			High Lumen		
			3000K	4000K	5000K	3000K	4000K	5000K	3000K	4000K	5000K
08-MPALDSR-242115L-3CCT (Set to T5)	Lumens		15,597	16,503	16,379	21,249	22,836	22,202	23,726	25,760	25,028
	Watts		110.32	107.19	109.95	162.08	156.31	161.84	189.35	181.92	189.3
	Efficacy		141.38	153.96	148.97	131.10	146.09	137.18	125.30	141.60	132.21
	Input Current (A)	120V	0.92	0.89	0.92	1.35	1.30	1.35	1.58	1.52	1.58
		240V	0.46	0.45	0.46	0.68	0.65	0.67	0.79	0.76	0.79
		277V	0.40	0.39	0.40	0.59	0.56	0.58	0.68	0.66	0.68



COST LESS LIGHTING

08-MPALDSR

MULTI-PURPOSE AREA LUMINAIRE
LUMEN & KELVIN & DISTRIBUTION SELECTABLE

p. 866.633.6883 • f. 866.699.8099 • CostLessLighting.com

Series	Measure- ments	Low Lumen			Mid Lumen			High Lumen		
		3000K	4000K	5000K	3000K	4000K	5000K	3000K	4000K	5000K
08-MPALDSR-403530L-3CCT (Set to T3)	Lumens	28,358	30,523	30,063	33,217	35,499	34,522	37,668	40,931	39,524
	Watts	208.54	202.04	208.46	252.55	242.79	251.34	306.36	293.29	305.15
	Efficacy	135.98	151.07	144.21	131.53	146.21	137.35	122.95	139.56	129.52
	Input Current (A)	120V	1.74	1.68	1.74	2.10	2.02	2.09	2.55	2.44
		240V	0.87	0.84	0.87	1.05	1.01	1.05	1.28	1.22
		277V	0.75	0.73	0.75	0.91	0.88	0.91	1.11	1.06

Series	Measure- ments	Low Lumen			Mid Lumen			High Lumen		
		3000K	4000K	5000K	3000K	4000K	5000K	3000K	4000K	5000K
08-MPALDSR-403530L-3CCT (Set to T4)	Lumens	29,808	31,479	31,197	34,596	36,832	36,243	39,855	42,651	41,598
	Watts	202.7	197.61	202.17	243.2	236.45	242.7	294.12	284.53	293.19
	Efficacy	147.05	159.30	154.31	142.25	155.77	149.33	135.51	149.90	141.88
	Input Current (A)	120V	1.69	1.65	1.68	2.03	1.97	2.02	2.45	2.37
		240V	0.84	0.82	0.84	1.01	0.99	1.05	1.23	1.19
		277V	0.73	0.71	0.73	0.88	0.85	0.88	1.06	1.03

Series	Measure- ments	Low Lumen			Mid Lumen			High Lumen		
		3000K	4000K	5000K	3000K	4000K	5000K	3000K	4000K	5000K
08-MPALDSR-403530L-3CCT (Set to T5)	Lumens	28,557	30,596	30,044	32,892	35,509	34,603	37,520	40,893	39,484
	(Set to T3)	208.91	202.23	208.44	251.59	242.53	250.85	305.66	293.1	304.86
	Efficacy	136.70	151.29	144.14	130.74	146.41	137.94	122.75	139.52	129.52
	Input Current (A)	120V	1.74	1.69	1.74	2.10	2.02	2.09	2.55	2.44
		240V	0.87	0.84	0.87	1.05	1.01	1.05	1.27	1.22
		277V	0.75	0.73	0.75	0.91	0.88	0.91	1.10	1.06



Photometric Data

08-MPALDSR-242115L-3CCT (Set to T3)


Luminaire Data

Description	CCT, Lumen, and Dist Selectable Area Light
Total Lumens	25,681
Input Wattage	182
Efficacy (lm/W)	141
Max. Cd.	8929.5 (360H, 42V)
IES Classification	Type III
Longitudinal Classification	Very Short

Photometrics calculated at 4000k CCT
and highest power setting.

Luminaire Classification Systems (LCS)

LCS Zone	Lumens	%Lum
FL 0-30	2,432	9.5%
FM 30-60	8,409	33.1%
FH 60-80	3,938	15.3%
FVH 80-90	162	0.6%
BL 0-30	1,646	6.4%
BM 30-60	4,440	17.3%
BH 60-80	4,049	15.8%
BVH 80-90	515	2.0%
UL 90-100	0	0.0%
UH 100-180	0	0.0%
Total	25,681	100.0%
BUG Rating	B4-U0-G4	

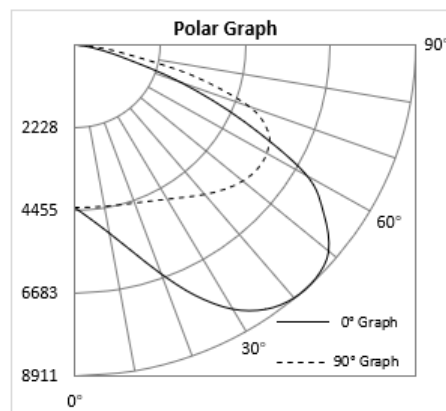

08-MPALDSR-242115L-3CCT (Set to T4)


Luminaire Data

Description	CCT, Lumen, and Dist Selectable Area Light
Total Lumens	26,679
Input Wattage	176
Efficacy (lm/W)	151
Max. Cd.	7473.9 (360H, 42V)
IES Classification	Type IV
Longitudinal Classification	Very Short

Photometrics calculated at 4000k CCT
and highest power setting.

Luminaire Classification Systems (LCS)

LCS Zone	Lumens	%Lum
FL 0-30	2,291	8.6%
FM 30-60	7,642	28.6%
FH 60-80	4,287	16.1%
FVH 80-90	208	0.8%
BL 0-30	1,827	6.8%
BM 30-60	5,474	20.5%
BH 60-80	4,498	16.9%
BVH 80-90	452	1.7%
UL 90-100	0	0.0%
UH 100-180	0	0.0%
Total	26,679	100.0%
BUG Rating	B4-U0-G4	

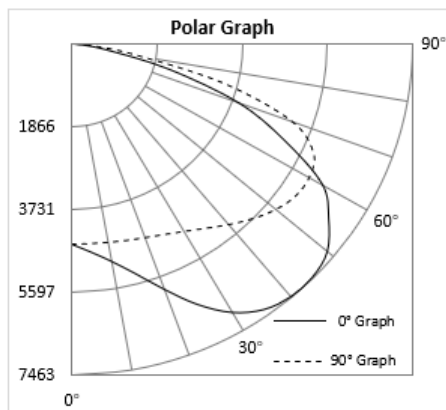

08-MPALDSR-242115L-3CCT (Set to T5)


Luminaire Data

Description	CCT, Lumen, and Dist Selectable Area Light
Total Lumens	25,872
Input Wattage	182
Efficacy (lm/W)	142
Max. Cd.	6052.4 (45H, 62V)
IES Classification	Type VS
Longitudinal Classification	Short

Photometrics calculated at 4000k CCT
and highest power setting.

Luminaire Classification Systems (LCS)

LCS Zone	Lumens	%Lum
FL 0-30	1,902	7.4%
FM 30-60	6,142	23.7%
FH 60-80	4,524	17.5%
FVH 80-90	238	0.9%
BL 0-30	1,879	7.3%
BM 30-60	6,006	23.2%
BH 60-80	4,843	18.7%
BVH 80-90	338	1.3%
UL 90-100	0	0.0%
UH 100-180	0	0.0%
Total	25,872	100.0%
BUG Rating	B4-U0-G3	

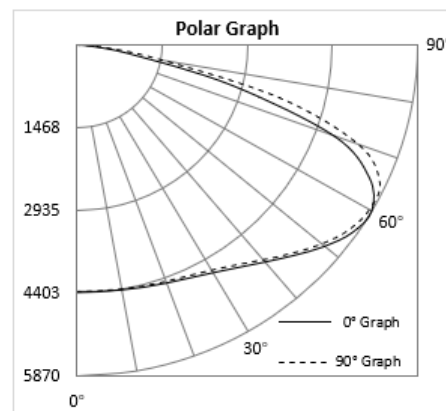



COST LESS LIGHTING

08-MPALDSR

MULTI-PURPOSE AREA LUMINAIRE
LUMEN & KELVIN & DISTRIBUTION SELECTABLE

p. 866.633.6883 • f. 866.699.8099 • CostLessLighting.com

08-MPALDSR-403530L-3CCT (Set to T3)


Luminaire Data

Description	CCT, Lumen, and Dist Selectable Area Light
Total Lumens	40,722
Input Wattage	290
Efficacy (lm/W)	140
Max. Cd.	14465 (360H, 44V)
IES Classification	Type III
Longitudinal Classification	Very Short

Photometrics calculated at 4000k CCT
and highest power setting.

Luminaire Classification Systems (LCS)

LCS Zone	Lumens	%Lum
FL 0-30	3,792	9.3%
FM 30-60	13,708	33.7%
FH 60-80	6,459	15.9%
FVH 80-90	247	0.6%
BL 0-30	2,598	6.4%
BM 30-60	6,973	17.1%
BH 60-80	6,272	15.4%
BVH 80-90	672	1.7%
UL 90-100	0	0.0%
UH 100-180	0	0.0%
Total	40,722	100.0%
BUG Rating	B5-U0-G5	

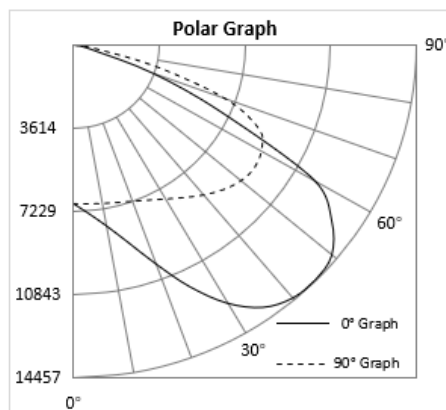

08-MPALDSR-403530L-3CCT (Set to T4)


Luminaire Data

Description	CCT, Lumen, and Dist Selectable Area Light
Total Lumens	42,479
Input Wattage	282
Efficacy (lm/W)	151
Max. Cd.	12150 (360H, 43V)
IES Classification	Type IV
Longitudinal Classification	Very Short

Photometrics calculated at 4000k CCT
and highest power setting.

Luminaire Classification Systems (LCS)

LCS Zone	Lumens	%Lum
FL 0-30	3,613	8.5%
FM 30-60	12,336	29.0%
FH 60-80	7,002	16.5%
FVH 80-90	315	0.7%
BL 0-30	2,909	6.8%
BM 30-60	8,725	20.5%
BH 60-80	6,987	16.4%
BVH 80-90	591	1.4%
UL 90-100	0	0.0%
UH 100-180	0	0.0%
Total	42,479	100.0%
BUG Rating	B5-U0-G5	

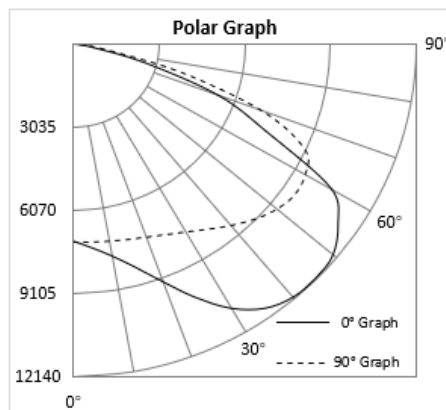

08-MPALDSR-403530L-3CCT (Set to T5)


Luminaire Data

Description	CCT, Lumen, and Dist Selectable Area Light
Total Lumens	41,022
Input Wattage	290
Efficacy (lm/W)	142
Max. Cd.	9674.1 (22.5H, 61V)
IES Classification	Type VS
Longitudinal Classification	Very Short

Photometrics calculated at 4000k CCT
and highest power setting.

Luminaire Classification Systems (LCS)

LCS Zone	Lumens	%Lum
FL 0-30	3,027	7.4%
FM 30-60	9,746	23.8%
FH 60-80	7,354	17.9%
FVH 80-90	360	0.9%
BL 0-30	3,008	7.3%
BM 30-60	9,607	23.4%
BH 60-80	7,498	18.3%
BVH 80-90	421	1.0%
UL 90-100	0	0.0%
UH 100-180	0	0.0%
Total	41,022	100.0%
BUG Rating	B5-U0-G3	

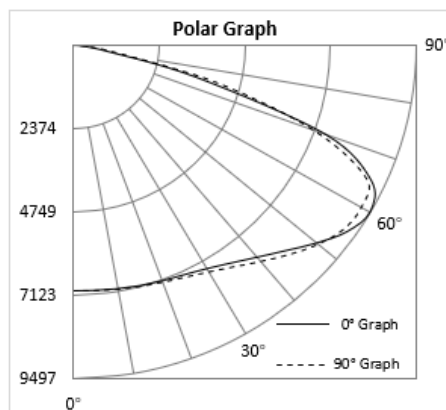



**COST LESS
LIGHTING**


08-MPALDSR

MULTI-PURPOSE AREA LUMINAIRE
LUMEN & KELVIN & DISTRIBUTION SELECTABLE

p. 866.633.6883 • f. 866.699.8099 • CostLessLighting.com

Dimensional Drawings

08-MPALDSR-242115L-3CCT

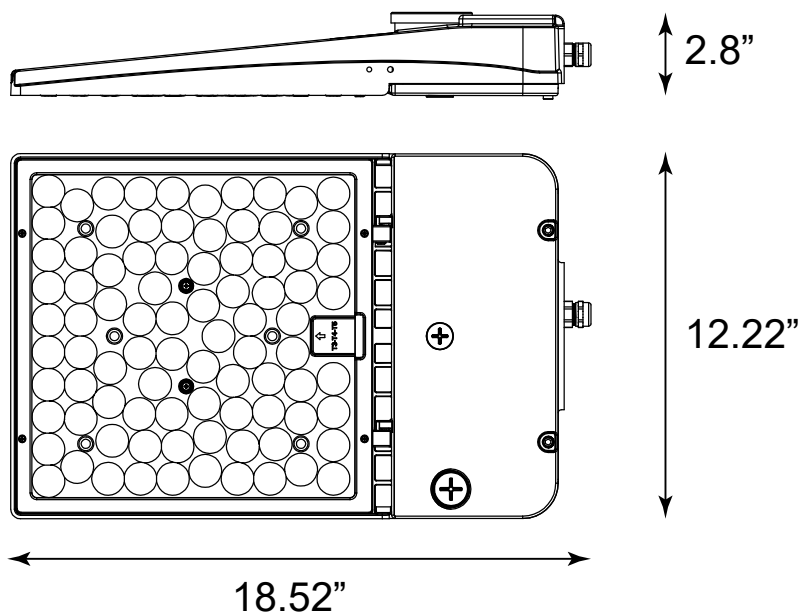

08-MPALDSR-403530L-3CCT

