





PROJECT	TYPE	CATALOG #



Model	Size (inches) & Weight (lbs)			
	L (in)	W (in)	H(in)	Weight
05-APEN4-221L-5CCT-SM	4.17	4.17	8.27	2.39
05-APEN4-221L-5CCT-CM	4.17	4.17	67.3	2.58

SERIES	NOMINAL LUMEN OUTPUT (Selectable)	KELVIN (Selectable)	MOUNTING METHOD
05-APEN4	221L = 2,000 / 1,600 / 1,000 lm	5CCT 2700K/ 3000K/ 3500K/ 4000K/ 5000K	SM Surface Mounting CM Cord Mounting

Specifications

Housing

- Premium powder-coat, aluminum, bronze housing.

Electrical

- Operating temperature (ambient): -40°C to 45°C (-40°F to 113°F).
- Universal 120-277V AC voltage (50-60Hz) is standard.
- 0-10VDC dimming drivers is standard.
- Surge protection = 4kV.
- Power factor > 0.90.

Optical System

- Silicon dioxide glass lens.
- Field selectable 2700k (soft white), 3000k (warm white), 3500k (warm/neutral white), 4000k (neutral white) and 5000k (cool white) color temperatures*.
- Tri-Lumen selectable provides a range of 978 to 1907 nominal lumens*.
- Long-life LEDs provide 140,000 hours of operation with at least 70% of initial lumen output (L70), and 41,000 hours with at least 90% of initial lumen output (L90)**.
- Fixtures comes installed with 40 degree reflector.
- Available field replaceable reflectors for 25° and 60°.
- LED color maintenance < 0.0004 chromaticity shift ($\Delta u'v'$) over the initial 6,000 hours of operation.
- Color rendering index > 90.

Mounting

- Surface mount (order -SM)
- Cord mount (order -CM)
- Optional Stem mount kit (Sold separately) †

Code Compliance

- cULus listed for wet locations.
- Energy Star certified.
- Complies with FCC part 15, class B.

Warranty

- 5-year warranty on all electronics and housing.

* Default kelvin temperature 4000k and highest lumen output.

**L₇₀ hours are IES TM-21-11 calculated hours.



Accessories (order separately)

Reflector

- 05-APEN4-REFL-25 = 25° Reflector for 05-APEN4-221L-5CCT
- 05-APEN4-REFL-60 = 60° Reflector for 05-APEN4-221L-5CCT

Mounting Option

- 05-APEN4-MT-STEM = Stem Mount for 05-APEN4-221L-5CCT (consists of 4 stems measuring 12") †

Mounting Accessory

- 05-APEN4-JBOX-COVER = Junction Box Cover for 05-APEN4-221L-5CCT

† **Note: Must order 05-APEN4-221L-5CCT-CM version (cord mount) to use stem mount kit.**

Compatible Dimmers & Controls

Manufacturer	Model Number	Dimmer Range	Load Switching Capacity
Best Lighting	DWS-010V-T	10%-100%	600W
Best Lighting	DWS-010V-D	10%-100%	600W
Leviton	IP710-LFZ	10%-100%	1200W
Lutron	DVSTV	10%-100%	450W

Electrical & Lumen Data

MODEL	Measurements	Low Lumens					Mid Lumens					High Lumens				
		2700K	3000K	3500K	4000K	5000K	2700K	3000K	3500K	4000K	5000K	2700K	3000K	3500K	4000K	5000K
05-APEN4-221L-5CCT	Lumens	978	1026	1074	1119	1200	1305	1367	1438	1509	1615	1527	1597	1679	1766	1907
	Watt	11.42	11.41	11.37	11.5	11.56	15.69	15.68	15.62	15.84	15.98	18.82	18.74	18.65	18.99	19.18
	Efficacy	85.64	89.92	94.46	97.30	103.81	83.17	87.18	92.06	95.27	101.06	81.14	85.22	90.03	93.00	99.43
	Input Current (A)	120V	0.10	0.10	0.09	0.10	0.10	0.13	0.13	0.13	0.13	0.13	0.16	0.16	0.16	0.16
240V		0.05	0.05	0.05	0.05	0.05	0.07	0.07	0.07	0.07	0.07	0.08	0.08	0.08	0.08	0.08
277V		0.04	0.04	0.04	0.04	0.04	0.06	0.06	0.06	0.06	0.06	0.07	0.07	0.07	0.07	0.07

Photometric Data

05-APEN4-221L-5CCT (Optional 25° reflector)


Luminaire Data

Description	Architectural Pendant Lumen/Kelvin Selectable
Total Lumens	1,819
Input Wattage	19
Efficacy (lm/W)	96
Spacing Criterion (0-180°)	0.38
Spacing Criterion (90-270°)	0.34

Photometrics calculated at 4000k, and highest lumen setting

Zonal Lumen Summary

Zone	Lumens	%Fixt
0-20°	1,033	56.8%
0-30°	1,363	75.0%
0-40°	1,698	93.4%
20-50°	752	41.3%
40-70°	103	5.7%
0-60°	1,799	98.9%
0-80°	1,803	99.1%
0-90°	1,803	99.1%
90-180°	16	0.9%
0-180°	1,819	100.0%

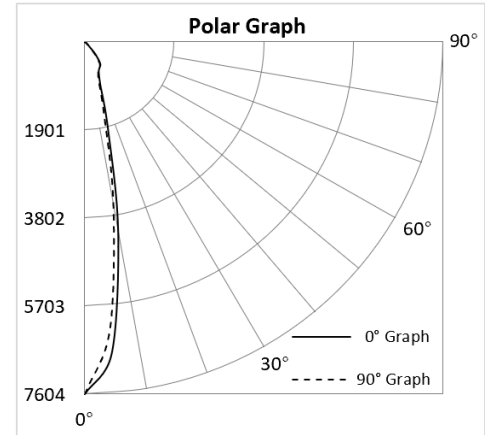

05-APEN4-221L-5CCT (40° reflector)


Luminaire Data

Description	Architectural Pendant Lumen/Kelvin Selectable
Total Lumens	1,766
Input Wattage	19
Efficacy (lm/W)	93
Spacing Criterion (0-180°)	0.58
Spacing Criterion (90-270°)	0.6

Photometrics calculated at 4000k, and highest lumen setting

Zonal Lumen Summary

Zone	Lumens	%Fixt
0-20°	913	51.7%
0-30°	1,309	74.1%
0-40°	1,648	93.3%
20-50°	830	47.0%
40-70°	115	6.5%
0-60°	1,758	99.5%
0-80°	1,765	100.0%
0-90°	1,766	100.0%
90-180°	0	0.0%
0-180°	1,766	100.0%

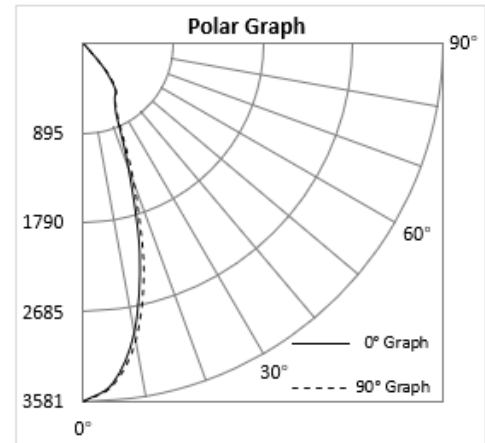

05-APEN4-221L-5CCT (Optional 60° reflector)

Luminaire Data

Description	Architectural Pendant Lumen/Kelvin Selectable
Total Lumens	1,798
Input Wattage	19
Efficacy (lm/W)	95
Spacing Criterion (0-180°)	0.86
Spacing Criterion (90-270°)	0.8

Photometrics calculated at 4000k, and highest lumen setting

Zonal Lumen Summary

Zone	Lumens	%Fixt
0-20°	684	38.1%
0-30°	1,236	68.7%
0-40°	1,665	92.6%
20-50°	1,074	59.7%
40-70°	113	6.3%
0-60°	1,771	98.5%
0-80°	1,782	99.1%
0-90°	1,783	99.1%
90-180°	15	0.9%
0-180°	1,798	100.0%

