


PROJECT	TYPE	CATALOG #

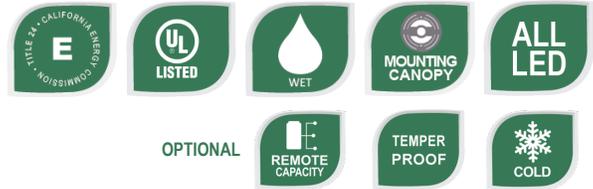

Model	Size (inches)		
	L (in)	W (in)	H (in)
04-WLCEM	12.40	2.48	12.17

MODEL	NO. OF FACES	LETTER COLOR	HOUSING COLOR	OPTIONS
04-WLCEM	1	Single Face	W White B Black G Gray (with white faceplate)	CW Cold Weather* RC Remote Capacity* TP Tamper Proof Screws
	2	Double Face		
	Blank	Universal Single/Double Face		
		RG Red/Green (Field-selectable)		

NOTES: \* Not available together.

## Specifications

### Housing

- 5VA flame retardant, UV stabilized polycarbonate in white, black or gray finish.
- High-impact resistant, UV stabilized polycarbonate clear lens.
- Corrosion resistant enclosure with engineering grade silicone gasket.
- Knockouts provided for conduit feed applications.
- EZ snap-out Chevron directional indicators.

### Electrical

- Dual 120 / 277V voltage.
- Unique LED indicator light alerts occupant on battery condition (Red-normal, Off-check battery).
- 3.6V long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and lampheads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Charge rate / power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.

### Illumination

- Long lasting, efficient, ultra bright white LED lamp heads.
- 1.0W (1 LEDs x 1.0 watt) per head.
- Adjustable LED Lamp heads provide up to 18-ft center-to-center spacing with 3-ft path of egress at 7.5-ft mounting height.
- Long-life, energy efficient Red or Green LED EXIT sign illumination.

### OPTIONS

- CW: Optional high capacity battery for extreme cold temperature applications (-20°C - 50°C).
- RC: Remote capacity of up to 2.0 watts.
- TP: Tamper-proof hardware helps prevent unauthorized access to the unit.

### Mounting

- Polycarbonate mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.

### Code Compliance

- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for wet locations (0°C - 50°C).
- Certified to CEC under Title 20 Regulations.

### Warranty

- 5-year warranty on all electronics and housing.
- Battery prorated for five years.



### Electrical Information

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
04-WLCEM	1.1	1.1	0.12	0.12

### Remote Lamp Compatibility

MODEL NUMBER	BATTERY	REMOTE CAPACITY	COMPATIBLE REMOTE HEAD FAMILY	
			04-RHLED	04-MRHLED
04-WLCEM-RC	3.6V	2.0W	X	X

### Dimensional Drawings

