






PROJECT	TYPE	CATALOG #



Model

Size (inches) & Weight (lbs)

	L (in)	W (in)	H (in)	Weight
08-MPAL-863L-3CCT	9.02	8.70	2.17	5.20
08-MPAL-16129L-3CCT	10.16	10.12	2.20	5.54

* Mounting hardware sold separately.
Pole tenons and tenon adapters available.
See all mounting accessories on page2.

SERIES	NOMINAL LUMEN OUTPUT (SELECTABLE)	KELVIN (SELECTABLE)
08-MPAL	863L = 8,000 / 6,000 / 3,000 lm	3CCT 3500K / 4000K / 5000K
	16129L = 16,000 / 12,000 / 9,000 lm	

Specifications

Housing

- Premium powder-coat, die cast aluminum, dark bronze housing.

Electrical

- Operating temperature (ambient): -40°C to 50°C (-40°F to 122°F).
- Universal 120-277V AC voltage (50-60Hz) is standard.
- 0-10V DC dimming drivers are standard.
- Integrated photocell is standard. Photocell can be enabled or disabled by switch.
- Incoming AC power cord = 3'. Incoming dimming cord = 3'.
- Watertight, compression-type electrical connectors.
- Input transient surge protection = 6kV.
- Power factor > 0.90.
- Total Harmonic distortion < 20%.

Optical System

- Polycarbonate lens.
- Field selectable 3500K (warm white), 4000K (neutral white) and 5000K (cool white) color temperatures.*
- 08-MPAL-863L-3CCT Tri-lumen selectable provide a range of 3,406 to 7,589 nominal lumens*.
- 08-MPAL-16129L-3CCT Tri-lumen selectable provide a range of 8,421 to 15,775 nominal lumens*.
- Long-life LEDs provide 167,000 hours of operation with at least 70% of initial lumen output (L70), and 51,000 hours with at least 90% of initial lumen output (L90)**.
- NEMA flood distribution 7H6V or IES roadway Type V.
- LED color maintenance < -0.0012 chromaticity shift ($\Delta u'v'$) over the initial 6,000 hours of operation.
- Color rendering index > 80.

Mounting

- Knuckle mounting is standard.
- Optional Yoke Mounting kit.
- Optional Arm Mounting kit.*
- Optional Slip-fitter Mounting kit.*

* Only for 08-MPAL-16129L-3CCT, need to be used with ZZ-MPAL-MT-ADPT.

Code Compliance

- cULus listed for wet locations.
- Complies with FCC part 15, class A.
- IP65 rated for ingress protection.
- IK08 rated for impact protection.

Warranty

- 5-year warranty on all electronics and housing.

* Default kelvin temperature 4000k, highest lumen output.

*** L_{70} & L_{90} hours are IES TM-21-11 calculated hours.



COST LESS LIGHTING

08-MPAL

MULTI-PURPOSE AREA LUMINAIRE

LUMEN & KELVIN SELECTABLE

p. 866.633.6883 • f. 866.699.8099 • CostLessLighting.com

Accessories (order separately)

Mounting Option

08-ZZ-MPAL-MT-ADPT	=	MPALDSR to MPAL Mounting Adapter for Arm and Slip Fitter
08-MPAL-YK-16129L	=	Yoke Mount for 08-MPAL-16129L-3CCT, Bronze
08-MPAL-YK-863L	=	Yoke Mount for 08-MPAL-863L-3CCT, Bronze
08-MPALDSR-ARM	=	Arm Mount (2-3/8" pole or pole tenon, round and square poles)
08-MPALDSR-SF	=	Slip Fitter (2-3/8" pole or pole tenon)

Compatible Dimmers & Controls

Manufacturer	Model Number	Dimmer Range	Load Switching Capacity
Best Lighting	DWS-010V-T	10%-100%	600W
Best Lighting	DWS-010V-D	10%-100%	600W
Leviton	IP710-LFZ	10%-100%	1200W
Lutron	DVSTV	10%-100%	450W

Effective Projected Areas (EPA)

Series	WITHOUT MOUNT			ARM MOUNT			ARM A MOUNT			SLIP FITTER MOUNT			KNUCKLE MOUNT			YOKE MOUNT		
	Front (ft²)	Side (ft²)	Face (ft²)	Front (ft²)	Side (ft²)	Face (ft²)	Front (ft²)	Side (ft²)	Face (ft²)	Front (ft²)	Side (ft²)	Face (ft²)	Front (ft²)	Side (ft²)	Face (ft²)	Front (ft²)	Side (ft²)	Face (ft²)
08-MPAL-863L-3CCT	0.34	0.08	0.12	0.56	0.29	0.18	0.58	0.39	0.38	0.58	0.23	0.18	0.41	0.13	0.13	0.43	0.09	0.13
08-MPAL-16129L-3CCT	0.46	0.09	0.14	0.51	0.31	0.20	0.71	0.40	0.44	0.71	0.25	0.21	0.54	0.17	0.15	0.59	0.11	0.15



COST LESS LIGHTING

08-MPAL

MULTI-PURPOSE AREA LUMINAIRE

LUMEN & KELVIN SELECTABLE

p. 866.633.6883 • f. 866.699.8099 • CostLessLighting.com

Lumen Table and Electrical Data

Series	Measure-ments		8L			6L			3L		
			3500K	4000K	5000K	3500K	4000K	5000K	3500K	4000K	5000K
08-MPAL-863L-3CCT	Lumens		7,355	7,589	7,289	5,543	5,672	5,545	3,406	3,430	3,436
	Watts		49.5	47.93	49.33	36.28	35.43	36.24	21.98	21.56	21.94
	Efficacy		148.59	158.34	147.76	152.78	160.09	153.01	154.96	159.09	156.61
	Input Current (A)	120V	0.41	0.40	0.41	0.30	0.30	0.30	0.18	0.18	0.18
		240V	0.21	0.20	0.21	0.15	0.15	0.15	0.09	0.09	0.09
		277V	0.18	0.17	0.18	0.13	0.13	0.13	0.08	0.08	0.08

Series	Measure-ments		16L			12L			9L		
			3500K	4000K	5000K	3500K	4000K	5000K	3500K	4000K	5000K
08-MPAL-16129L-3CCT	Lumens		14,766	15,775	14,881	11,099	11,738	11,408	8,421	8,782	8,664
	Watts		99.72	97.21	101.44	71.19	69.77	72.42	51.97	51.12	52.53
	Efficacy		148.07	162.28	146.70	155.91	168.24	157.53	162.04	171.79	164.93
	Input Current (A)	120V	0.83	0.81	0.85	0.59	0.58	0.60	0.43	0.43	0.44
		240V	0.42	0.41	0.42	0.30	0.29	0.30	0.22	0.21	0.22
		277V	0.36	0.35	0.37	0.26	0.25	0.26	0.19	0.18	0.19



Photometric Data

08-MPAL-863L-3CCT


Luminaire Data

Description	CCT, Lumen, and Dist Selectable Area Light
Total Lumens	7,589
Input Wattage	48
Efficacy (lm/W)	158
Max. Cd.	4097.7 (360H, 4V)
IES Classification	Type I
Longitudinal Classification	Very Short

Photometrics calculated at 4000k CCT
and highest power setting.

Luminaire Classification Systems (LCS)

LCS Zone	Lumens	%Lum
FL 0-30	1,510	19.9%
FM 30-60	1,945	25.6%
FH 60-80	394	5.2%
FVH 80-90	25	0.3%
BL 0-30	1,468	19.3%
BM 30-60	1,848	24.3%
BH 60-80	378	5.0%
BVH 80-90	22	0.3%
UL 90-100	0	0.0%
UH 100-180	0	0.0%
Total	7,589	100.0%
BUG Rating	B3-U0-G1	

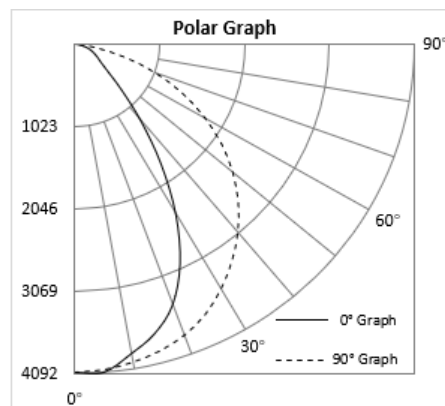

08-MPAL-16129L-3CCT


Luminaire Data

Description	CCT, Lumen, and Dist Selectable Area Light
Total Lumens	15,775
Input Wattage	97
Efficacy (lm/W)	162
Max. Cd.	8635.5 (180H, 11V)
IES Classification	N.A.
Longitudinal Classification	N.A.

Photometrics calculated at 4000k CCT
and highest power setting.

Luminaire Classification Systems (LCS)

LCS Zone	Lumens	%Lum
FL 0-30	3,108	19.7%
FM 30-60	3,804	24.1%
FH 60-80	589	3.7%
FVH 80-90	32	0.2%
BL 0-30	3,359	21.3%
BM 30-60	4,195	26.6%
BH 60-80	654	4.1%
BVH 80-90	33	0.2%
UL 90-100	0	0.0%
UH 100-180	0	0.0%
Total	15,775	100.0%
BUG Rating	B4-U0-G2	

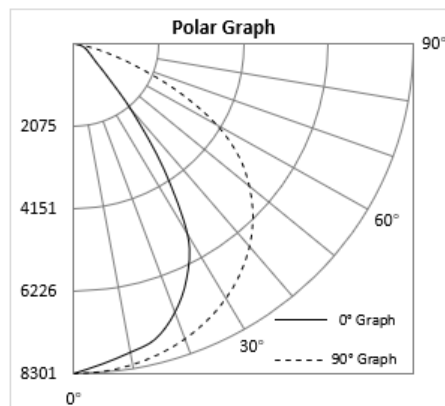



**COST LESS
LIGHTING**

08-MPAL


MULTI-PURPOSE AREA LUMINAIRE

LUMEN & KELVIN SELECTABLE

p. 866.633.6883 • f. 866.699.8099 • CostLessLighting.com

Dimensional Drawings

08-MPAL-863L-3CCT

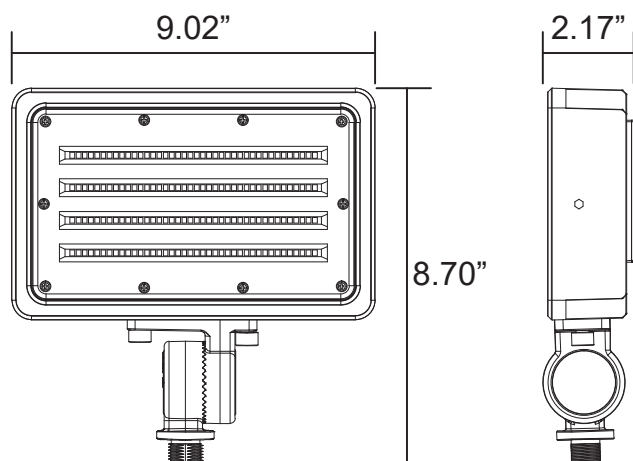

08-MPAL-16129L-3CCT

