



PROJECT	TYPE	CATALOG #



Model	Size (inches) & Weight (lbs)			
	H (in)	W (in)	B (in)	Weight
06-BOL-UFO-302317L-3CCT	42.25	9.76	6.3	13.22

SERIES	NOMINAL LUMEN OUTPUT (Selectable)	KELVIN (Selectable)	HOUSING COLOR
06-BOL-UFO	302317L = 3,000 / 2,300 / 1,700 lm	3CCT 3K / 4K / 5K	Blank Dark Bronze BLK Black

Specifications

Housing

- Premium powder-coat, aluminum, dark bronze or black housing.

Electrical

- Operating temperature (ambient): -40°C to 60°C (-40°F to 140°F).
- Universal 120-277V AC voltage (50-60Hz) is standard.
- 0-10VDC dimming drivers are standard.
- Input transient surge protection = 4kV.
- Power factor > 0.90.
- Total Harmonic distortion < 20%.

Optical System

- High-impact, Polycarbonate Lens.
- Field selectable 3000k(warm white), 4000k (neutral white) and 5000k (cool white) color temperatures*.
- Tri-lumen selectable delivers 1,700 to 3,000 nominal lumens*.
- Long-life LEDs provide 192,000 hours of operation with at least 70% of initial lumen output (L70), and 58,000 hours with at least 90% of initial lumen output (L90)**.
- LED color maintenance ≤ 0.00313 chromaticity shift ($\Delta u'v'$) over the initial 6,000 hours of operation.
- Color rendering index > 70.

Mounting

- Anchor Bolt mount kit (Order separately).

Code Compliance

- cULus listed for wet locations.
- Complies with FCC part 15, class A.
- IP65 rated for ingress protection.
- IK10 rated for impact protection.

Warranty

- 5-year warranty on all electronics and housing.

* Default kelvin temperature 4000k and highest lumen output.

**L₇₀ & L₉₀ hours are IES TM-21-11 calculated hours.



Accessories (order separately)

Mounting

06-BOL-R-MTGKIT = Round Bollard Anchor Bolt Mounting Kit

Compatible Dimmers & Controls

Manufacturer	Model Number	Dimmer Range	Load Switching Capacity
Leviton	IP710-LFZ	10%-100%	1200W
Lutron	DVSTV	10%-100%	450W

Electrical and Lumen Data

Series	Measurements	Low Lumens			Mid Lumens			High Lumens		
		3000K	4000K	5000K	3000K	4000K	5000K	3000K	4000K	5000K
06-BOL-UFO-302317L-3CCT	Lumens	1,725	1,770	1,784	2,316	2,385	2,373	2,927	3,019	2,992
	Watt	13.32	13.15	13.47	18.19	17.86	18.31	23.52	22.96	23.63
	Efficacy	130	135	132	127	134	130	124	131	127
	Input Current (A)	120V	0.11	0.11	0.11	0.15	0.15	0.15	0.20	0.19
240V		0.06	0.05	0.06	0.08	0.07	0.08	0.10	0.10	0.10
277V		0.05	0.05	0.05	0.07	0.06	0.07	0.08	0.08	0.09



Photometric Data

06-BOL-UFO-302317L-3CCT

Luminaire Data

Description	BOLLARD (UFO) Highest power, 4K CCT
Total Lumens	3,019
Input Wattage	23
Efficacy (lm/W)	132
Max. Cd.	1189.1 (292.5H, 57V)
IES Classification	Type III
Longitudinal Classification	Short


Zonal Lumen Summary

Zone	Lumens	%Fixt
0-30°	165	5.5%
0-60°	1,886	62.5%
0-80°	2,947	97.6%
80-90°	53	1.7%
0-90°	3,000	99.3%
90-110°	9	0.3%
110-180°	0	0.0%
0-180°	3,019	100.0%

Luminaire Classification Systems (LCS)

LCS Zone	Lumens	%Lum
FL 0-30	79	2.6%
FM 30-60	842	27.9%
FH 60-80	542	17.9%
FVH 80-90	27	0.9%
BL 0-30	86	2.9%
BM 30-60	878	29.1%
BH 60-80	519	17.2%
BVH 80-90	26	0.9%
UL 90-100	5	0.1%
UH 100-180	15	0.5%
Total	3,020	100.0%
BUG Rating	B2-U2-G2	

180° Polar Graph

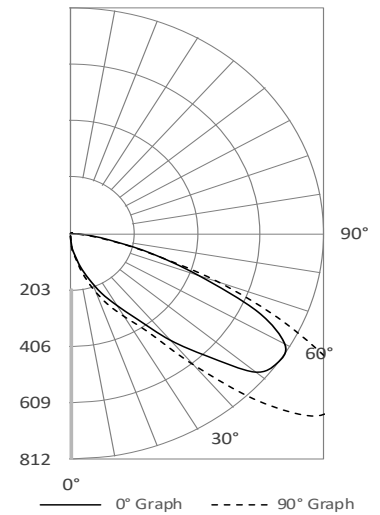

Dimensional Drawings

